


REQ. PER UNIT	USED ON		TT262	B
	MODEL	ASSY. NO.		
4	CMRA-1	A4220	5-11-65	

ELECTRICAL SPECS.
(w/o SLUG)
OPERATING FREQUENCY:
INDUCTANCE @ 2.5 MC
PRIMARY: $17.5 \mu h \pm .5 \mu h$
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 2.5 MC MIN/0.

MECHANICAL SPEC.
TURNS
PRIMARY: 66
SECONDARY: 66
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

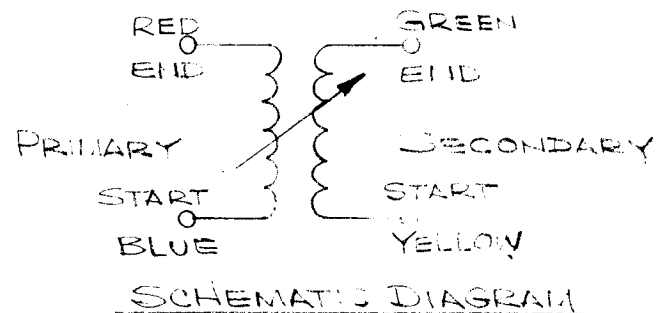

SYMBOL	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
B	CHG POSITION OF STAMPING FOR TT262	8/31/72	20962	GE	CL	CL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK TRANSFORMER, RF, ADJ. IF-T7		
A	1/2 SIZE ADVISED		14877	AK	Q/B						
Ø	ORIGINAL RELEASE FOR PRODUCTION	5-11-65	X	W/L							
X	EXPER. RELEASE	5-11-65	X	W/L							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES							SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2A4275							
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.	TT262 B