


REQ. PER UNIT	USED ON			TT264	A
	MODEL	ASS'Y. NO.	DATE		
1	CMRA-1	A421G	5-13-65		

ELECTRICAL SPECS.
w/o SLUG

OPERATING FREQUENCY:
INDUCTANCE @ 1.75 Mc
PRIMARY: 9.5 μ h \pm 1.0 μ h
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 1.75 Mc, MIN 15

MECHANICAL SPEC.

TURNS
PRIMARY: 70
SECONDARY: 5
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

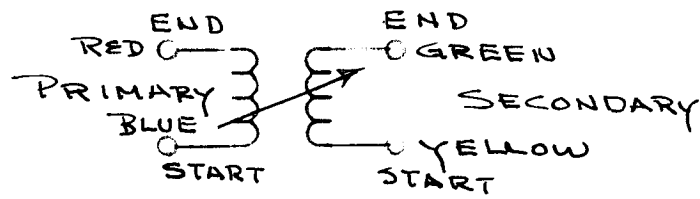

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		TRANSFORMER, RF ADJ.	
		SYN-A-T2	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	DRAWN	CHECKED
DECIMALS X \pm .05 XX \pm .01 XXX \pm .005	FRACTIONS \pm 1/64 ANGLES \pm 0° 30'	TYPE & TEMPER	HEAT TREAT. SPEC.
TOLERANCES	CODE	FINISH & SPEC. NO.	ELEC. DES. APP.
	A		MECH. DES. APP.
	2A4278		
		TT264	A