REQ. PER UNIT	USED ON MODEL	ASSY. NO.	DATE	TT265	B
1	CMRA-1	A4216	5-11-65		





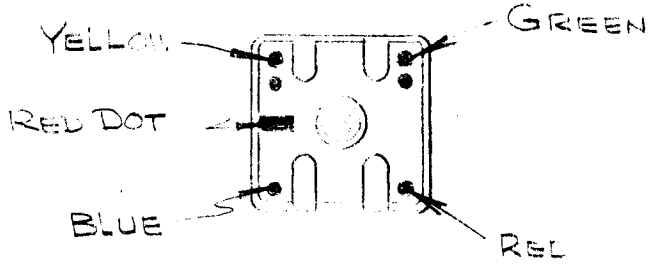

ELECTRICAL SPECS. (W/O SLUG)

OPERATING FREQUENCY:
INDUCTANCE @ 7.9mc
PRIMARY: 3.00 μh ± .30 μh
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 7.9mc Min. 50

MECHANICAL SPEC.

TURNS
PRIMARY: 28
SECONDARY: 4
COLOR CODE: RED
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWDERED IRON

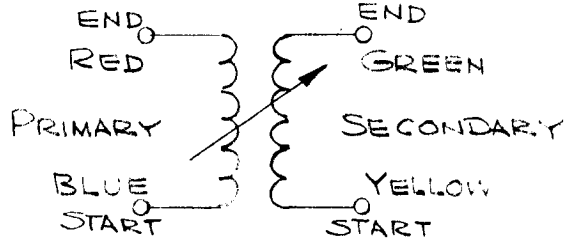

SCHEMATIC DIAGRAM

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	IND. WAS 3.4 μh	6/18/65	16571	HME		
A	PRI. IND. WAS ± 0.17 μh	7/18/66	16571	HME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/14/65	X	CJL		
X	EXPER. RELEASE	5/11/65	X	CJL		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
TOLERANCES
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE

CODE A

2A4260

REQ.	ITEM	PART NO.
—	1	—

STOCK SIZE: —

MATERIAL: — | —

CORE & TERMINAL | HEAT TREAT SPEC.: — | —

FINISH & SPEC. NO.: —

DESCRIPTION: THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK

TRANSFORMER, RF, ADJ.

SYN-A-T3

SYMBOL

DRAWN: H.L.K.

CHECKED: 5/13/65

FINAL APPROVAL: 5/14/65

ENGR. DES. APP.

MECH. DES. APP.

TT265 B