


REQ. PER UNIT	USED ON		TT267 B
	MODEL	DATE	
1	CMRA-1	5-13-65	

ELECTRICAL SPECS.  
(W/O SLUG)  
OPERATING FREQUENCY:  
INDUCTANCE @ 1.75 MHz  
PRIMARY: 9.5 μH ± 1.0 μh  
SECONDARY: NOT RATED  
"Q" (PRIMARY) @ 1.75 MHz Min. 15

MECHANICAL SPEC.  
TURNS  
PRIMARY: 70  
SECONDARY: 5  
COLOR CODE: RED  
CASE: COPPER CAN  
CASE FINISH: TIN-PLATED  
QUANTITY TERM: 4  
MATERIAL:  
CORE & SLUG: POWDERED IRON

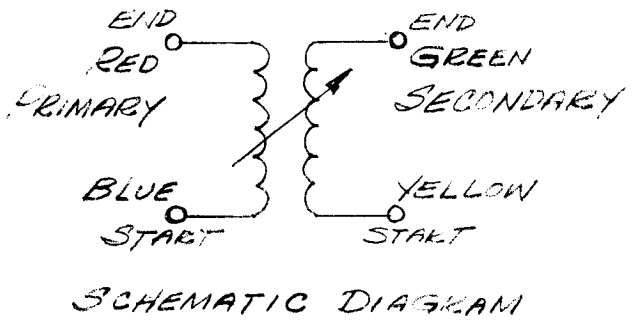

B	RELOC. TT267	12-7-66	17373	RME	Q/B	REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL	
A	ELEC. SPECS. REVISED	7-1-65	16577		Q/B		—A—	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
φ	ORIG. RELEASE	5/14/65	7				STOCK SIZE		TRANSFORMER, RF. ADJ.	
X	EXPER. RELEASE	5-13-65	X	HLA			—A—	SYN-B-T3		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE								
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2A42GG		TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
								HLA	5/14/65	5/14/65
										TT267 B