


REQ. PER UNIT	USED ON			TT268	A
	MODEL	ASSY. NO.	DATE		
1	CMRA-1	A4218	5-13-65		

**ELECTRICAL SPECS.**  
(W/O SLUG)  
OPERATING FREQUENCY:  
INDUCTANCE @ 1.75 MHz  
PRIMARY: 9.5  $\mu$ h  $\pm$  1.0  $\mu$ h  
SECONDARY: NOT RATED  
"Q" (PRIMARY) @ 1.75 MHz Min. 15

**MECHANICAL SPEC.**  
TURNS  
PRIMARY: 70  
SECONDARY: 5  
COLOR CODE: RED  
CASE: COPPER CAN  
CASE FINISH: TIN-PLATED  
QUANTITY TERM: 4  
MATERIAL:  
CORE & SLUG: POWDERED IRON

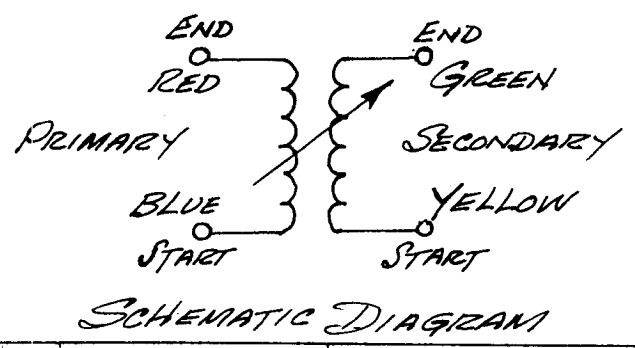

REQ.	ITEM	PART NO.	DOSE	DESCRIPTION	SYMBOL								
A	ELEC. SPECS. REVISED	7-18-65	165073	RME	Q/10								
Ø	ORIGINAL RELEASE FOR PRODUCTION	5/21/65	HLA										
X	EXPER. RELEASE	5-13-65	X	HLA									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
DECIMALS X $\pm$ .05 XX $\pm$ .01 XXX $\pm$ .005		FRACTIONS $\pm$ 1/64 ANGLES $\pm$ 0° 30'		CODE A		2A4267		HLA		JPB		5/21/65	
TOLERANCES		SCALE		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN		CHECKED		FINAL APPROVAL	
												TT268 A	
												TT268 A	