

REQ. PER UNIT	USED ON		
	MODEL	ASSY. NO.	DATE
1	CDN-3	A 4354	2/11/66
2	CDN-3	A 4356	2/11/66


TT278

Ø

**ELECTRICAL SPECS.**  
 (WITH SLUG INSERTED)  
 OPERATING FREQUENCY: 355 KHZ  
 INDUCTANCE @ 790 KHZ  
 PRIMARY: 112 UH + & - 20 UH  
 SECONDARY: NOT RATED  
 "Q" (PRIMARY) @ 355 KHZ: > 20

**MECHANICAL SPEC.**

**TURNS**  
 PRIMARY: 84  
 SECONDARY: 336  
 COLOR CODE: GRAY  
 CASE: COPPER CAN  
 CASE FINISH: TIN-PLATED  
 QUANTITY TERM: 4  
 MATERIAL:  
 CORE & SLUG: POWERED IRON

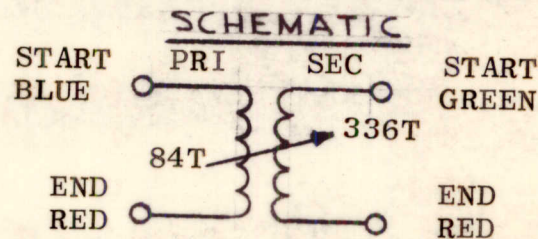

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE		CODE		2A4418	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		TOLERANCES		A	

REQ. ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL
#	#		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
#	#		TRANSFORMER, RF, ADJUSTABLE	
#	#	J.L.	QCB	MWHay
TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
#	#	QCB		
FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	TT278 Ø	