

REQ. PER UNIT	USED ON			TT 279	Ø
	MODEL	ASS'Y. NO.	DATE		
2	CDN-3	A 4350	2/11/66		


**ELECTRICAL SPECS.
(WITH SLUG INSERTED)**

OPERATING FREQUENCY: 355 KHZ
 INDUCTANCE @ 790 KHZ
 PRIMARY: 115 UH + AND - 15 UH
 SECONDARY: NOT RATED
 "Q" (PRIMARY) @ 355 KHZ: > 80

MECHANICAL SPEC.

TURNS
 PRIMARY: 84
 SECONDARY: 84
 COLOR CODE: GRAY
 CASE: COPPER CAN
 CASE FINISH: TIN-PLATED
 QUANTITY TERM: 4
 MATERIAL:
 CORE & SLUG: POWERED IRON

SCHEMATIC

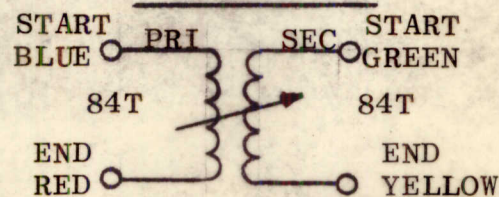

REQ.	ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL			
				THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK				
				TRANSFORMER, RF, ADJUSTABLE				
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-11-66	Ø	<i>MS</i>	<i>HO</i>			
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE						
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2A4419				
					J.L.	<i>MS</i>	<i>M. H. May</i>	
					DRAWN	CHECKED	FINAL APPROVAL	
					<i>ChRB</i>			
					FINISH & SPEC. NO.	ELEC. DES. APP.	MECH. DES. APP.	
							TT 279	Ø