REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	TT281	Ø
1	CDN-3	A 4352	2/11/66		

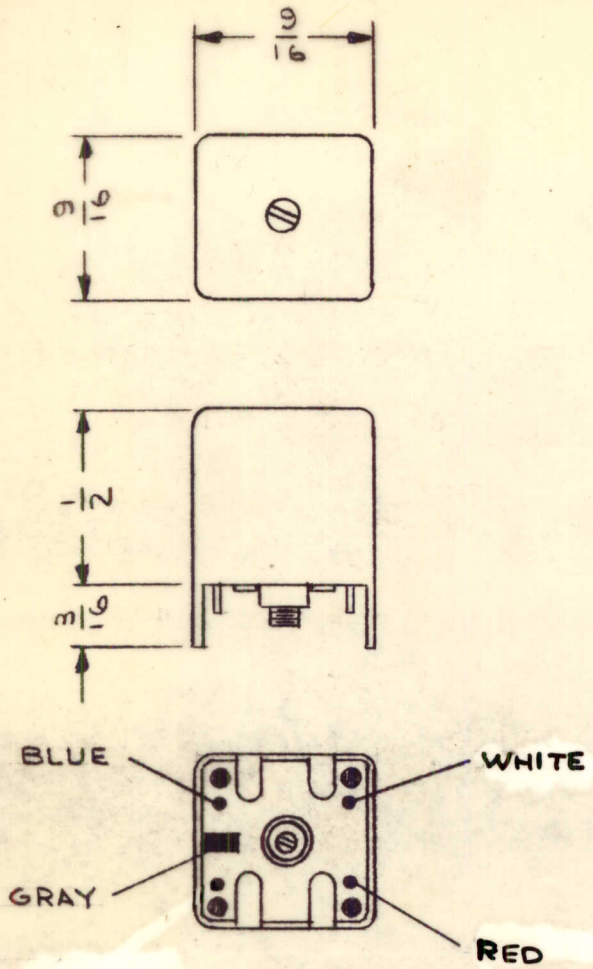

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY: 355 KHZ
INDUCTANCE @ 2.5 MHZ
PRIMARY: 73 UH + & - 5 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 355 KHZ: > 70

MECHANICAL SPEC.

TURNS
PRIMARY: 72 TAPPED AT 8
SECONDARY:
COLOR CODE: GRAY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWERED IRON

SCHEMATIC



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-16-66	Ø			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE
CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

2A4421

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			POSE	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TRANSFORMER, RF, ADJUSTABLE

DRAWN	CHECKED	FINAL APPROVAL
J.L.		

ELEC. DES. APP. | MECH. DES. APP.

TT281 Ø

TMC FORM 108-A

4

REPROVEL NO. 440H 23845