REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	TT282	Ø
1	CDN-3	A 4352	2/11/66		

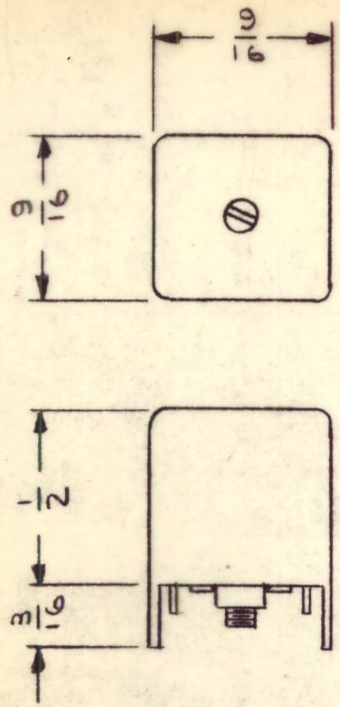

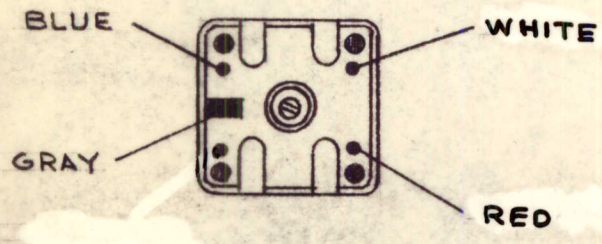

ELECTRICAL SPECS.
(WITH SLUG INSERTED)

OPERATING FREQUENCY: 100 KHZ
INDUCTANCE @ 790 KHZ
PRIMARY: 450 UH + & - 15 UH
SECONDARY: NOT RATED
"Q" (PRIMARY) @ 100 KHZ: > 55

MECHANICAL SPEC.

TURNS
PRIMARY: 178 TAPPED AT 5
SECONDARY:
COLOR CODE: GRAY
CASE: COPPER CAN
CASE FINISH: TIN-PLATED
QUANTITY TERM: 4
MATERIAL:
CORE & SLUG: POWERED IRON

SCHEMATIC

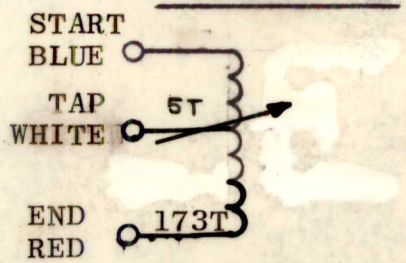

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	2-16-66	Ø			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05 .XX ±.01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE

CODE A

2A4422

REQ.	ITEM	PART NO.	POSE	DESCRIPTION	SYMBOL

STOCK SIZE

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

TRANSFORMER, RF, ADJUSTABLE

MATERIAL

TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL
		J.L.		

FINISH & SPEC. NO.

ELEC. DES. APP.	MECH. DES. APP.	TT282	Ø

TMC FORM 106-A

REPROVEL NO. 440H 23848