
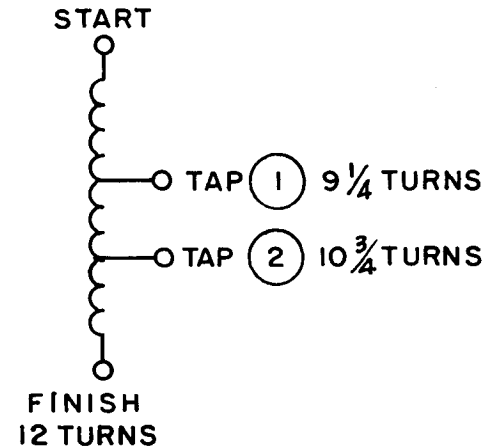


SYMBOL	FUNCTION	OPER. FREQ.	USED ON	QUAN.	REQ. PER UNIT	USED ON			TZ-121	A
						MODEL	ASS'Y. NO.	DATE		
T1202	FT TANK	4 TO 8 MC	TTR-10 AX-410	1	1	TTR-10	AX-410	7-6-63		

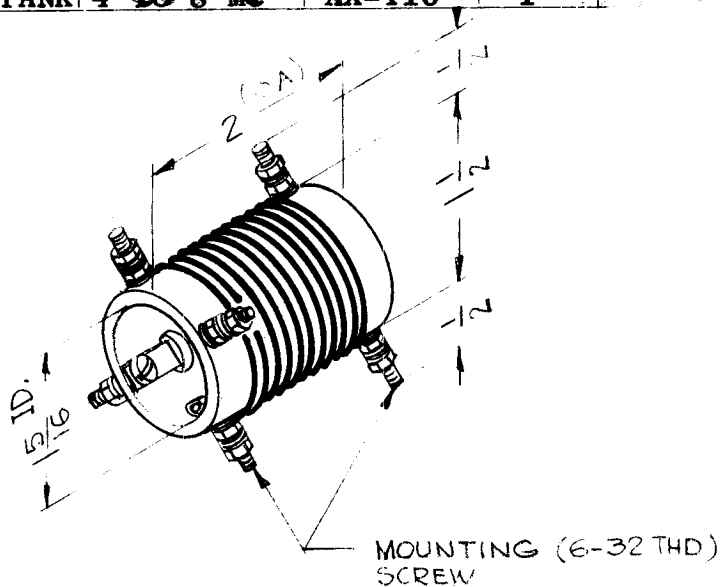

— SCHEMATIC —

ELECTRICAL SPECIFICATIONS

- TOTAL INDUCTANCE (START TO FINISH)
4.5 UHY ± .40UHY
- "Q" AT TEST FREQUENCY - GREATER THAN 290
- TEST FREQUENCY - 7.9MC

WINDING DATA

WINDING NO. 1
 NOMINAL INDUCTANCE = 4.5UH
 NO. OF TURNS = 12
 NO. OF TAPS = 2
 NO. OF TURNS TAPPED = 9 1/4
 & 10 3/4

TERMINALS

QUAN. = 4
 TYPE = SCREW

COIL FORM DATA

MATERIAL - PHENOLIC

							REQ. ITEM	PART NO.	R. KOHN	DESCRIPTION	E3037-21	SYMBOL	
									THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
									TRANSFORMER, RF, FT				
A	CLERICAL CHANGE	824.64		WB									
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	S401-47						G.D.L.				
							TYPE & TEMPER	HEAT TREAT. SPEC.	DRAWN	CHECKED	FINAL APPROVAL		
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE	2A-3208						R. KOHN 10-18-63	R. KOHN 10-18-63	TZ-121	A
							FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.			