
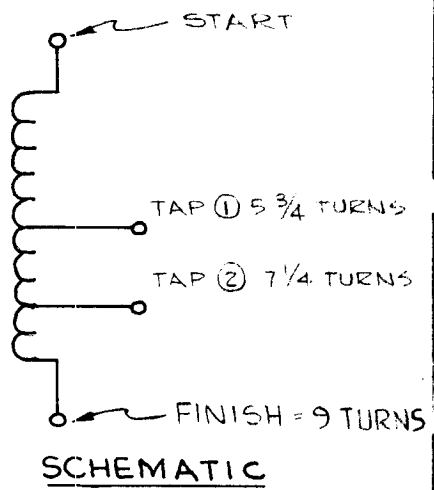


REQ. PER UNIT	USED ON			TZ-122	A
	MODEL	ASS'Y. NO.	DATE		
1	TTR-10	AX-411	7-6-63		

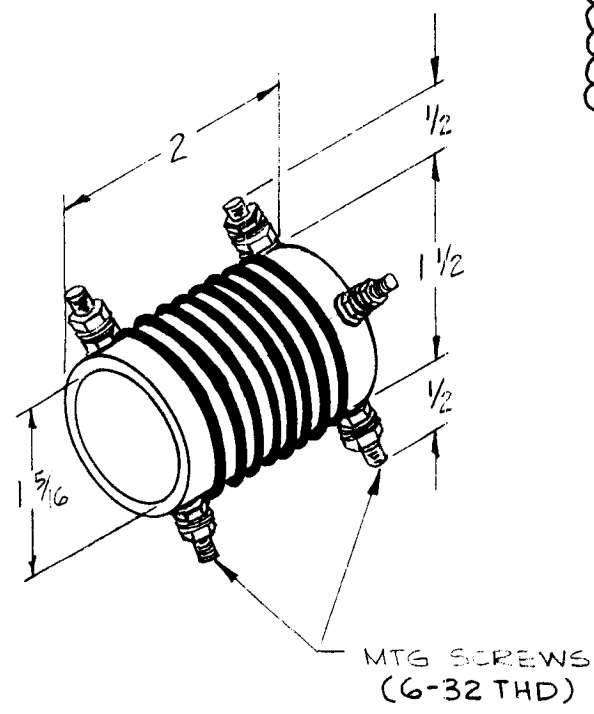

WINDING DATA

WINDING NO. 1
 NOMINAL INDUCTANCE 2.4uh
 NO. OF TURNS = 9 EQ. SPACED - RANDOM WOUND - RIGHT HAND TURN
 NO. OF TAPS = 2
 NO. OF TURNS TAPPED = 5 3/4 & 7 1/4
COIL FORM DATA
 MATERIAL: PHENOLIC
TERMINALS:
 QUAN. = 4
 TYPE = SCREW

ELECTRICAL SPECIFICATIONS

INDUCTANCE $L = 2.4uh \pm .24uh$
 Q = GREATER THAN 290
 F = 7.9 MC
 D. C. RESISTANCE = NOT RATED
 CURRENT RATING

				REQ. ITEM	PART NO.		KOHN DESCRIPTION E3037-22			SYMBOL	
				STOCK SIZE			THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK				
							TRANSFORMER, R.F., F.T.				
A	CLERICAL CHANGE	8.24.64		MB							
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	MATERIAL				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE S-401-47						DRAWN <i>R. KOHN</i>		CHECKED <i>R. KOHN</i>	FINAL APPROVAL <i>15P</i>
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	CODE A	2A-3209				R. KOHN	R. KOHN	TZ-122	A
				FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.			