


| | | | | |
|---------|----|----|---------|-----|
| TMC P/N | A | B | ITEM 1 | L |
| TZ210 | 12 | 9 | CI128-1 | 30 |
| TZ210-2 | 34 | 11 | CI127-1 | 8.5 |

| REQ. PER UNIT | USED ON | | |
|---------------|-----------|------------|---------|
| | MODEL | ASS'Y. NO. | DATE |
| 1 | RFTA-1 | | 4.29.65 |
| 1 | TLAA-2.5K | | |
| 1 | TLAD-2.5K | | |


TZ210 B

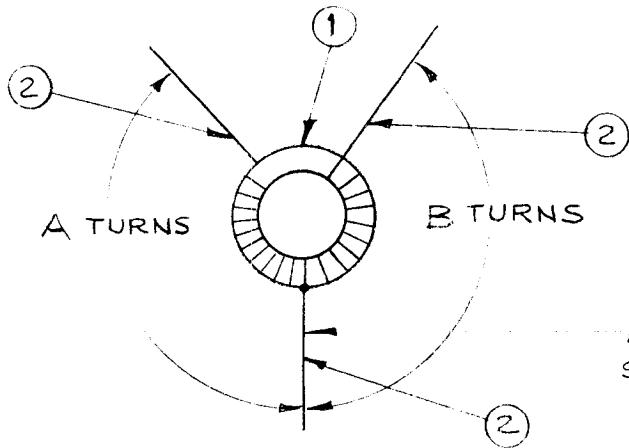

ALL LEADS TO BE 1" LONG, STRIPPED & TINNED 1/2"

SPECIFICATIONS:
L - SEE CHART *uh* MIN
Q - 125 MIN

TEST FREQ - 2.5 MCG

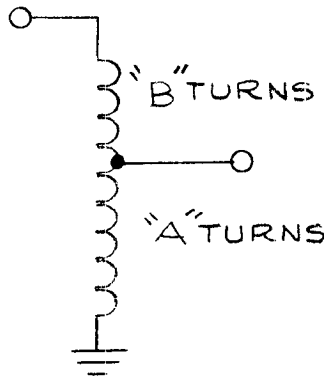

| | | | | | | | | | | | | | | | | | |
|---|--------------------------|---|-------|--------------|-----|-----------|---|-----------------|------------------------|-------------------|--|-------|--|---------|--|----------------|--|
| B | TZ 210 ("L" WAS 45) | 121.69 | 19208 | 98 | JWL | FB | 1 | 1 | SEE CHART | CORE, FERRAMIC | | | | | | | |
| A | REV. & UPDATED | 7.9.68 | 18991 | H.G. | | FB | REQ. ITEM | PART NO. | F. BUDETTI DESCRIPTION | SYMBOL | | | | | | | |
| Ø | ORIGINAL RELEASE FOR PRO | 11/3/66 | Q | RME | | | THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK | | | | | | | | | | |
| XZ | L WAS 53 <i>uh</i> | 5/17/65 | XZ | | | | TRANSFORMER, RF | | | | | | | | | | |
| X1 | SPECS ADDED | 5/12/65 | X1 | | | | MATERIAL | | | | | | | | | | |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES | | SCALE | | DO NOT SCALE | | | | | | | | | | | | | |
| DECIMALS .X ± .05 .XX ± .01 .XXX ± .005 | | FRACTIONS ± 1/64 ANGLES ± 0° 30' | | TOLERANCES | | CODE A | | TYPE & TEMPER | | HEAT TREAT. SPEC. | | DRAWN | | CHECKED | | FINAL APPROVAL | |
| FINISH & SPEC. NO. | | | | | | | | ELEC. DES. APP. | | MECH. DES. APP. | | TZ210 | | B | | | |