


WI-126 A

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

T M C PART NO.	MANUFACTURER'S NUMBER		CONDUCTOR SIZE	CONDUCTOR STRAND	NOM. INSUL. WALL THICKNESS	NOMINAL O. D.	VOLTAGE BREAKDOWN 60 cps	INSULATION COLOR
WI-126-1	1638	Red	18	65/36	.090	.230	22,000	Red
WI-126-2	1638	Black	18	65/36	.090	.230	22,000	Black
WI-126-3	1632	Red	20	41/36	.040	.125	5,000	Red
WI-126-4	1632	Black	20	41/36	.040	.125	5,000	Black

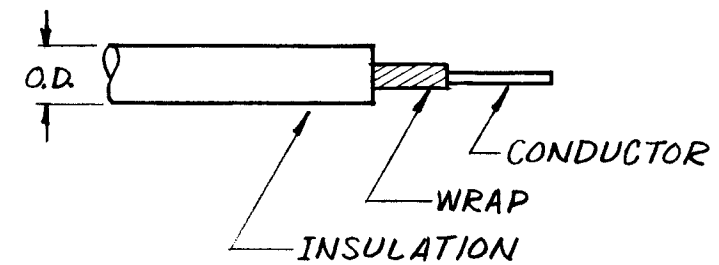

- SPECIFICATIONS:**
- 1) TYPE: SINGLE CONDUCTOR
 - 2) CONDUCTOR: STRANDED TINNED SOFT ANNEALED COPPER
 - 3) WRAP: PAPER
 - 4) INSULATION: RUBBER, SMOOTH SATIN FINISH, COLOR PER CHART
 - 5) APPLICATION: (Suggested)
 - A) TEST LEADS WHERE EXTRA FLEXIBILITY IS REQUIRED
 - 6) PACKAGING DATA:
 - A) AVAILABLE IN 100 FOOT, 250 FOOT, 500 FOOT AND 1,000 FOOT SPOOLS

REF: ALPHA WIRE CORPORATION

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
			THE TECHNICAL MATERIEL CORP, MAMARONECK, NEW YORK	
			WIRE, ELECTRICAL	
			(SINGLE CORD, INSULATED, TEST LEAD TYPE)	
			DRAWN <i>[Signature]</i>	CHECKED <i>[Signature]</i>
			FINAL APPROVAL <i>[Signature]</i>	
			WI-126 A	

A	REDRAWN & REVISED	11-1-62	7567	58	<i>[Signature]</i>	<i>[Signature]</i>
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED:		SCALE:				
DIMENSIONS ARE IN INCHES		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.				
TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		REMOVE ALL BURRS AND SHARP EDGES				
		REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
		USED ON				