


REVISIONS						
E.M.N.NO	DRAFT	CHKD	ZONE	LTR	DESCRIPTION	DATE
	0			0	ORIGINAL RELEASE FOR PRODUCTION	6/16/75

- ITEMS
- ▽ PIN NO
- LA101
- ▭ LA107

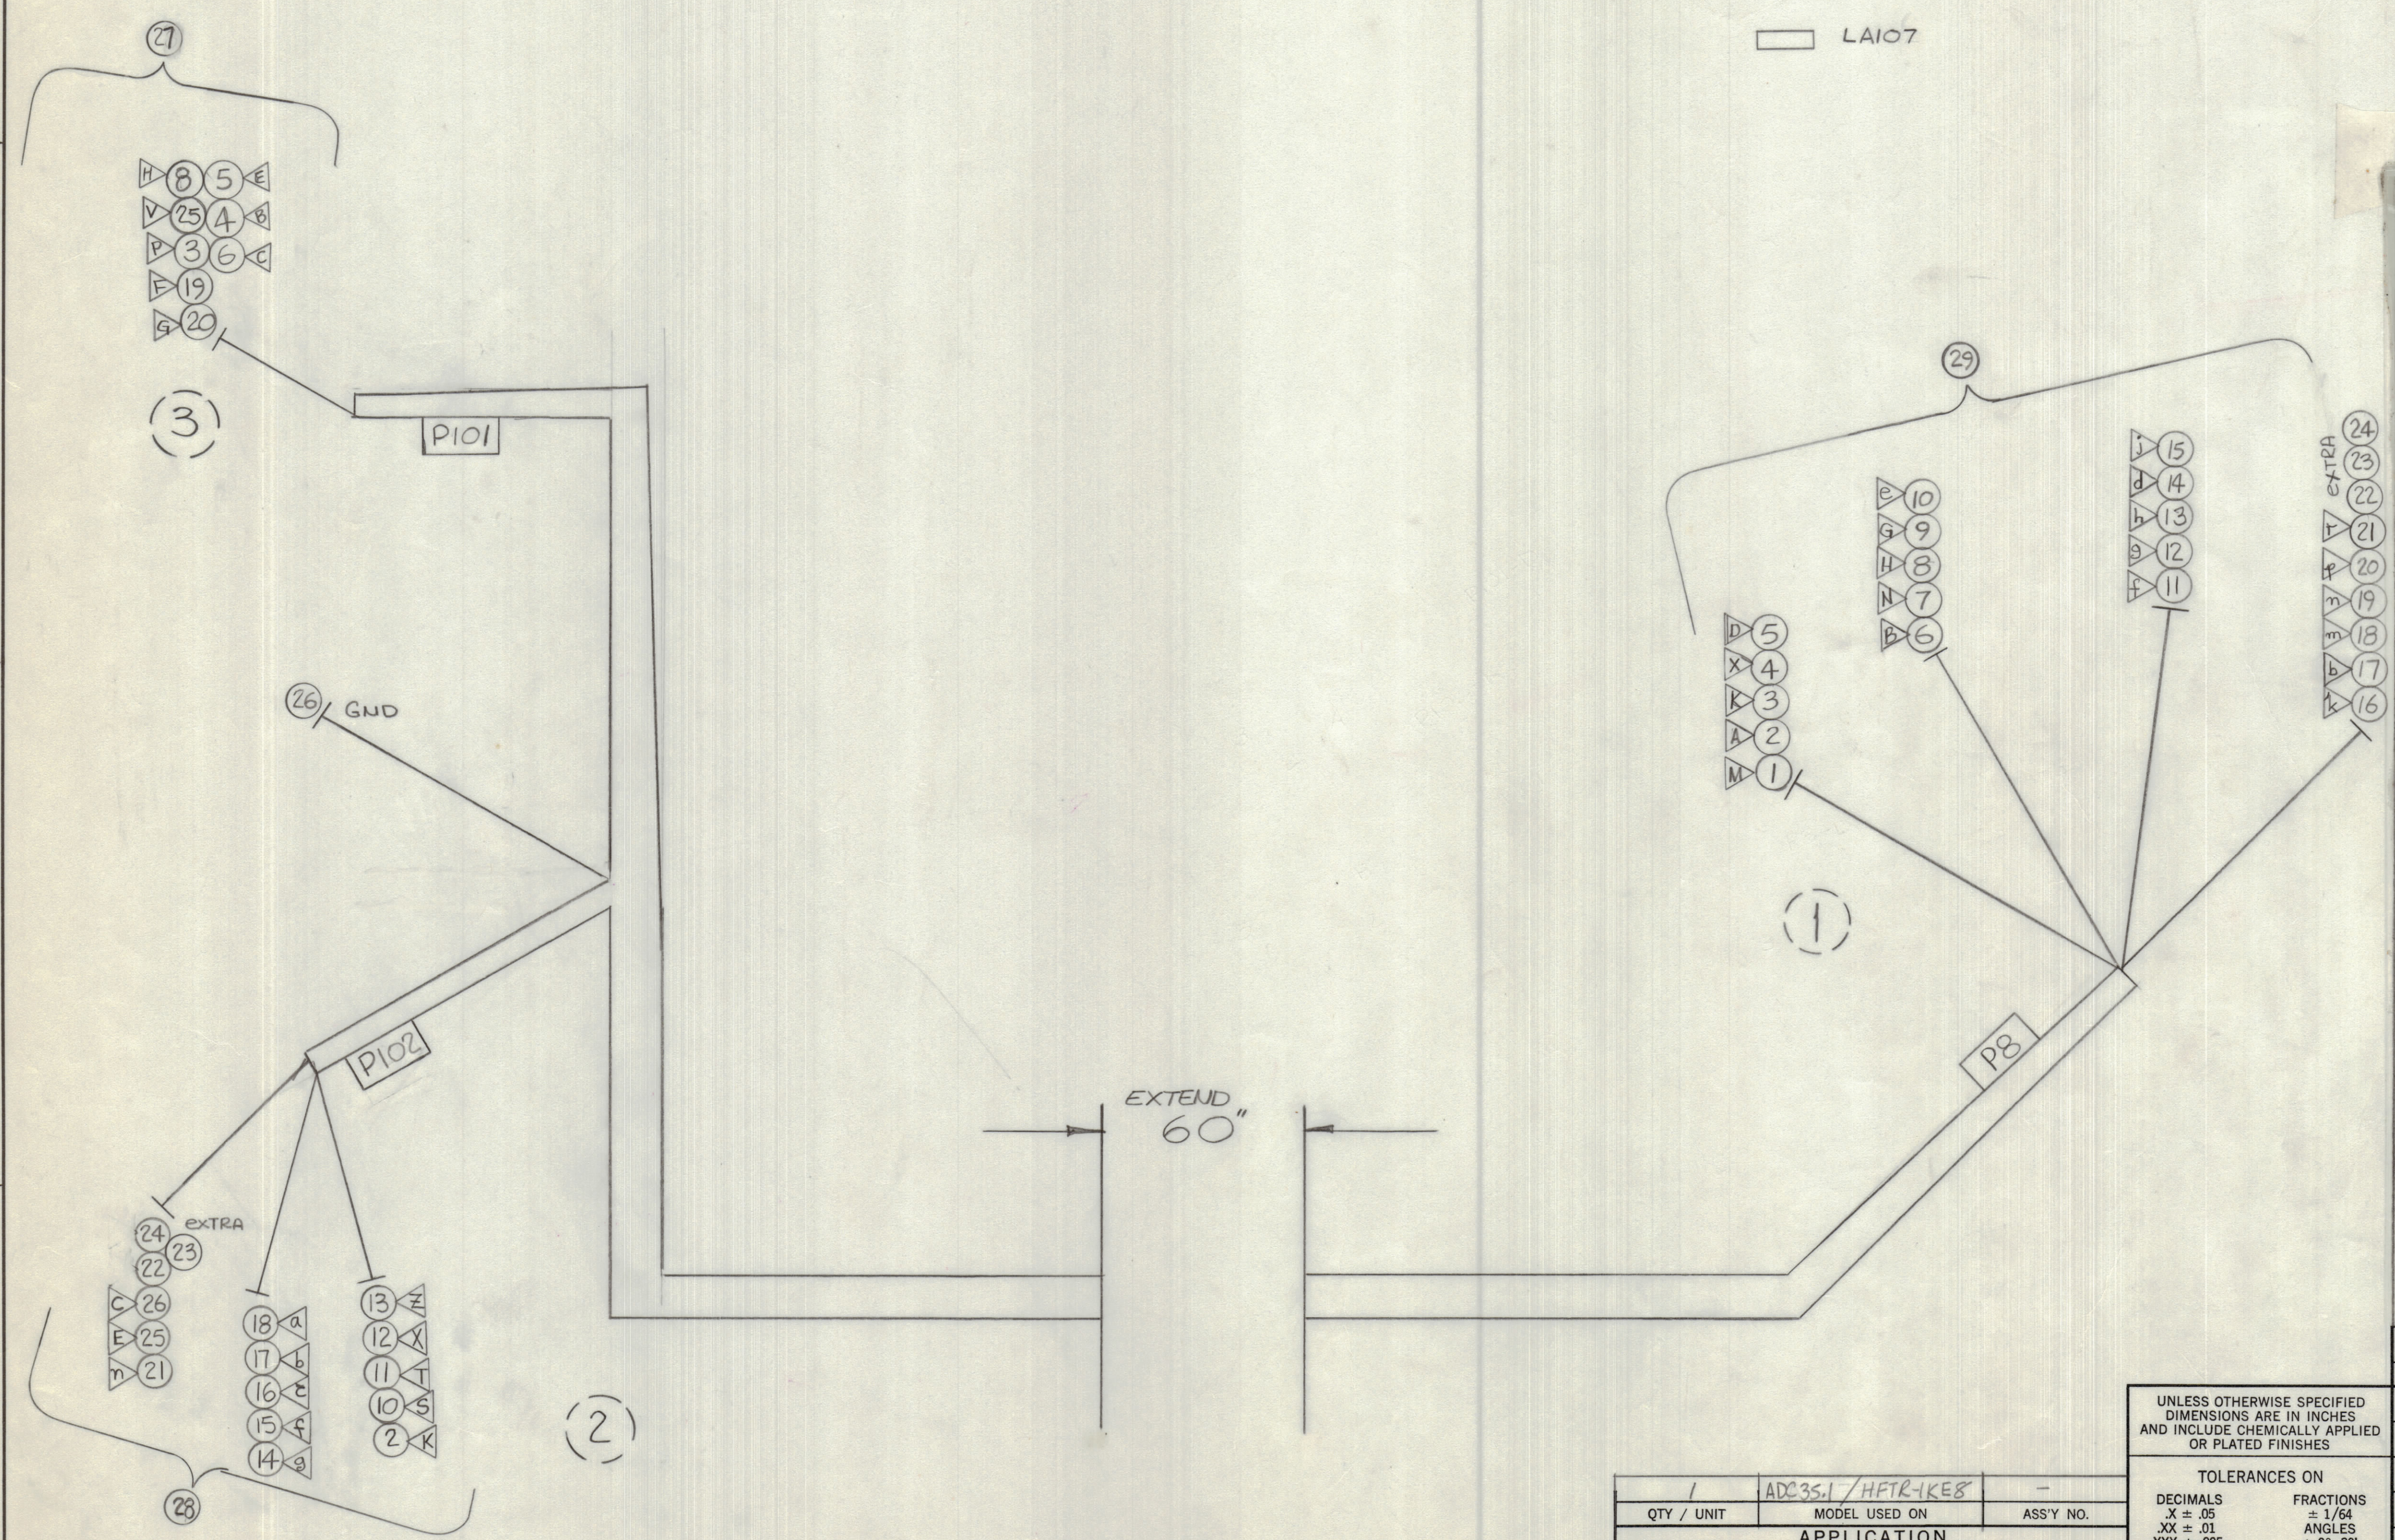

JUMPER REQ BETWEEN PIN A AND PIN B (+64V)

EXTEND 60"

1	ADC35.1/HFTR-1KE8	-
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON  
 DECIMALS .X ± .05  
 FRACTIONS ± 1/64  
 ANGLES ± 0° -30'  
 .XX ± .01  
 .XXX ± .005

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
CABLE, REMOTE INTERFACE (INTERFACE PANEL TO RDCR-1YC)				
FINAL APPROVAL		DATE	SIZE CODE IDENT NO. DWG NO.	
MECH. DES.		DATE	D 82679 CA 1769	
ELECT. DES.		DATE	ISSUE	
CHECKED		DATE	12-5-74	
DRAWN		DATE	SCALE SHEET OF	

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.



REQ	ITEM	PART NUMBER	BREAKOUT		DESTINATION OR DESCRIPTION	
			FROM	TO	FROM	TO
	1	LWC24(7) U1	1	2	P8-M	PIO2-K
	2		1	3	P8-A	PIO1-D
	3		1	3	P8-K	PIO1-P
	4		1	3	P8-X	PIO1-B
	5		1	3	P8-D	PIO1-E
	6		1	3	P8-B	PIO1-C
	7		1	2	P8-N	PIO2-J
	8		1	3	P8-H	PIO1-H
	9		1	3	P8-G	PIO1-X
	10		1	2	P8-e	PIO2-S
	11	91	1	2	P8-f	PIO2-T
	12	92	1	2	P8-g	PIO2-X
	13	93	1	2	P8-h	PIO2-Z
	14	94	1	2	P8-d	PIO2-g
	15	95	1	2	P8-j	PIO2-f
	16	96	1	2	P8-k	PIO2-z
	17	97	1	2	P8-b	PIO2-b
	18	98	1	2	P8-m	PIO2-a
	19	90	1	3	P8-n	PIO1-F
	20	1	1	3	P8-p	PIO1-G
	21	2	1	2	P8-r	PIO2-m
	22	3	1	2	extra	—
	23	4	1	2	extra	—
	24	LWC24(7) U5	1	2	extra	—
	25	MS3106B28 U6	2	3	P201-E	PIO1-V
	26	LWC24(7) U7	2	2	P201-26	GND
	27	MS3106B24-28P			CONN REC ML	PIO1
	28	MS3106B28-21P			CONN REC ML	PIO2
	29	MS3106B28-21P			CONN REC ML	P8
	30	LA101				
	31	LA107				



REQ	ITEM	PART NUMBER	BREAKOUT		DESTINATION OR DESCRIPTION	
			FROM	TO	FROM	TO
JUMPERS NEEDED BETWEEN INTERFACING CONN J5, J7, J8						
	1	LWC24(7) U1			J5-Z	J8-m
	2	(39) U2			J5-Y	J8-b
	3	(79) U3			J5-X	J8-k
	4	(5) U4			J5-W	J8-j
	5	(1) U5			J5-V	J8-d
	6	(4) U6			J5-P	J8-h
	7	(69) U7			J5-N	J8-g
	8	(29) U8			J5-D	J8-f
	9	(3) U91			J5-S	J8-e
	10	(19) U92			J7-W	J8-r
	11	(20) U93			J7-R	J8-p
	12	LWC27(7) U94			J7-S	J8-n
REMOVE WIRES FROM					J8-b & d	