


CH-106

VOLTAGE CHART

EQUIPMENT: CARRIER TELEGRAPH RECEIVER

MODEL: TAD-1

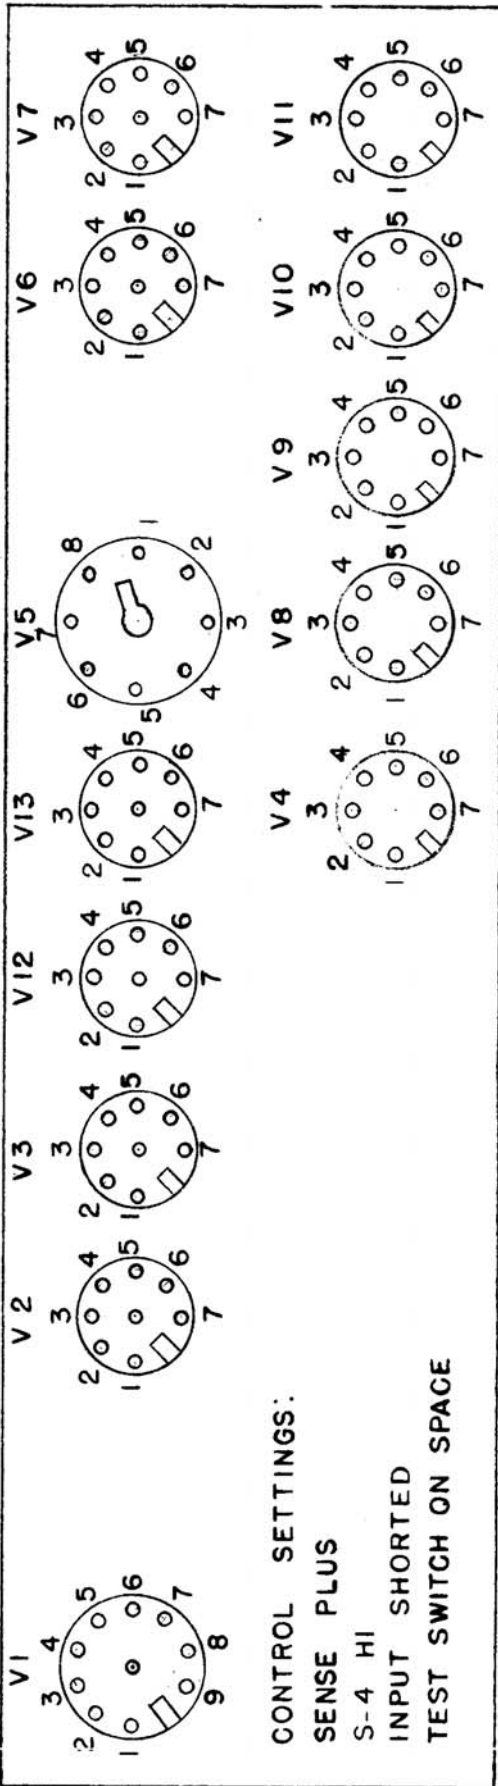

VOLTAGES MEASURED WITH V.T.V.M.

TUBE SYMBOL	FUNCTION	TYPE	PINS	VOLTS	PINS	VOLTS	PINS	VOLTS	PINS	VOLTS	PINS	VOLTS	PINS	VOLTS
V1	TONE AMP.	12AU7	1-G	165	2-G	0	3-G	7.1	6-G	309	7-G	0	8-G	15.0
V2	TONE RECT.	6AL5	5-2	-.5	1-7	1.2	3-4	AC6.3						
V3	TONE RECT.	6AL5	5-2	-.5	1-7	2.8	3-4	AC6.3						
V4	PULSE REST.	6J6	1-B-	160	2-B-	490	6-B-	120	7-B-	120	3-4	AC6.3	5-B-	40
V5	OUT. TUBE	6Y6	3-G	275	4-G	275	5-G	-145	8-G	0	2-7	AC6.3		
V6	POWER RECT.	6X4	1-G	AC275	6-G	AC275	7-G	330	3-4	AC6.3				
V7	BIAS RECT.	6X4	7-G	AC265	1-G	-340	6-G	-340	3-4	AC6.3				
V8	VOLT. REG.	OB2	5-2	-105										
V9	VOLT REG	OA2	5-2	-150										
V10	VOLT REG,	OA2	5-2	-150										
V11	VOLT REG.	OB2	5-2	-105										
V12	CLAMPER	6AL5	7-1	.4	5-2	-1.0	3-4	AC6.3						
V13	PULSE AMP.	6AU6	1-G	-.8	5-G	260	6-G	63	7-G	.5	3-4	AC6.3		