

REVISIONS					
E.M.N.O	DRAFT	CHKD	ZONE	LTR	DESCRIPTION
				X	ORIGINAL ISSUE
				X1	REVISED & UPDATED
					9-17-75

SERIE 100	
LAST SYMBOL	MISSING SYMBOLS
C147, CR105	C107, C108, C128
B101, DS102	C133, C134, C135
F102, L110	C136, CR105
J104, K101	L108, L109
M101, P101	R111, R114, R118, R119,
R135, S107	
T105, TB102	
K102	


PC 721/A5608	
LAST SYMBOL	MISSING SYMBOLS
C13	C9
CR10	
Q1	
R4	

PC 722/A5609	
LAST SYMBOL	MISSING SYMBOLS
CR9	
R5	

PC 719/A5604	
LAST SYMBOL	MISSING SYMBOLS
C9	
DS9	

PC 723/A5610	
LAST SYM	MISSING SYMS
C3	
CR3	
Q2	
R5	

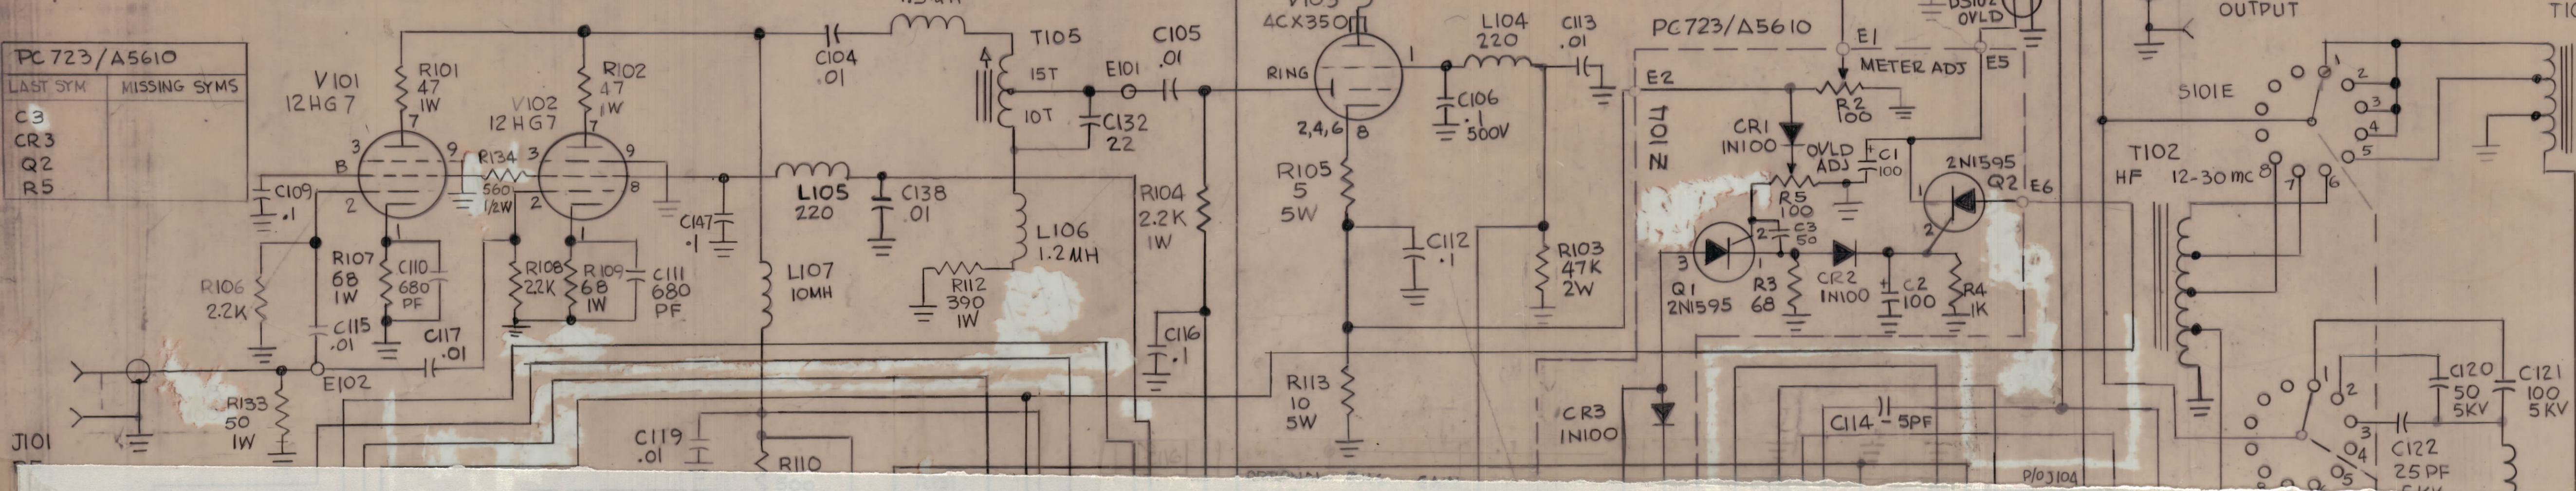


NOTES:  
 1- ALL CAPACITANCE VALUES ARE IN MICROFARADS  
 2- ALL RESISTANCE VALUES ARE IN OHMS.  
 3- ALL INDUCTANCE VALUES ARE IN MICROHENRIES.

BAND	FREQ
1	2-2.6
2	2.6-3
3	3-5
4	5-8
5	8-12
6	12-16

USE ONLY FOR GPTA (CHILE)

FOR GENERAL USE SEE CK 2112-A (ROLL SIZE)

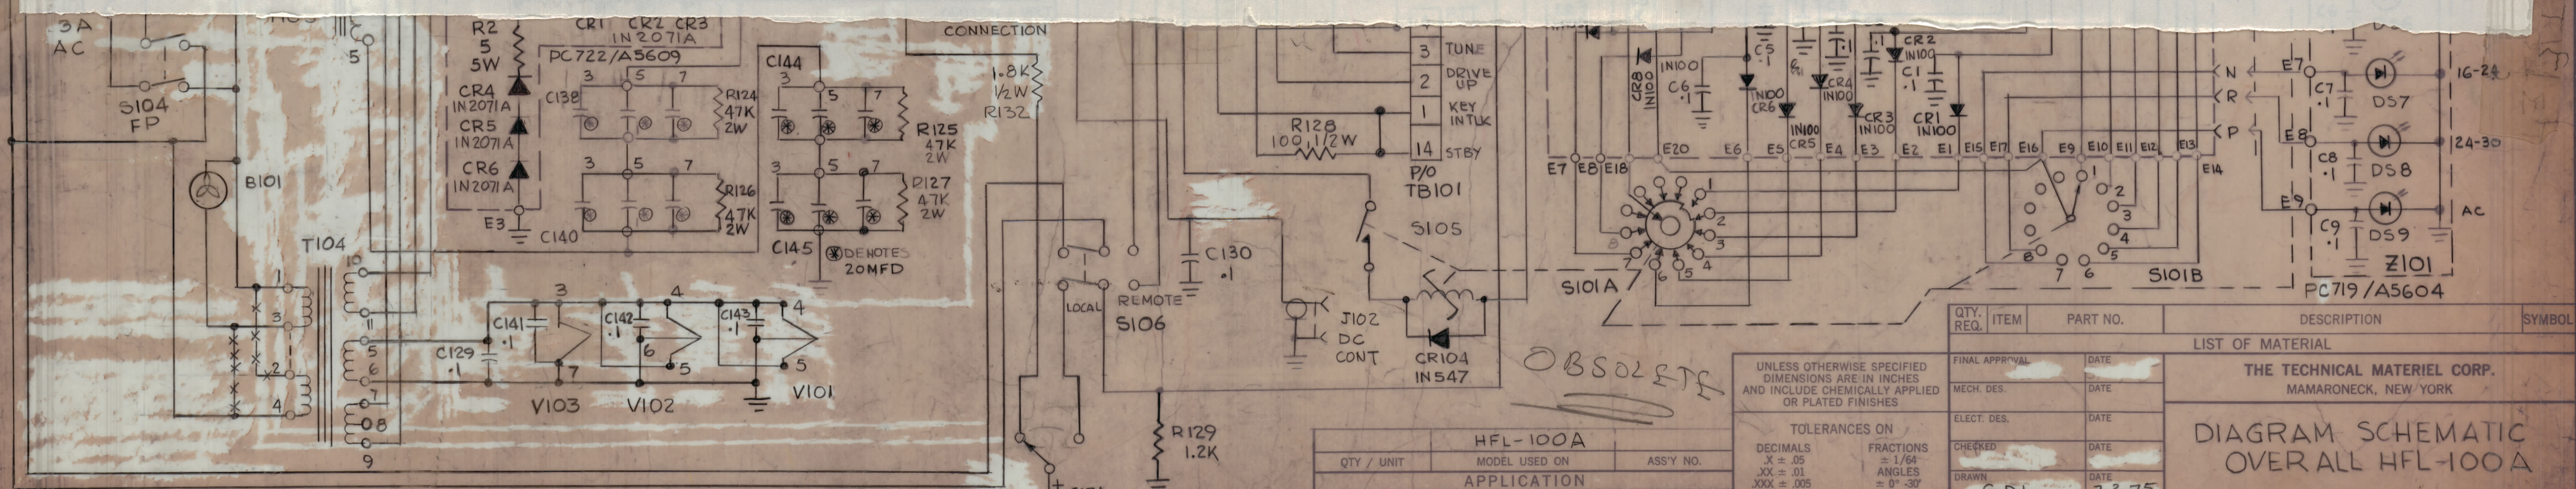

\* FAN REMAINS CONNECTED TO 115AC WHEN INPUT IS 220AC FOR 220V OPERATION ON T103 & T104 DISCONNECT JUMPERS 1, 2, 3 AND 4 MARKED \*\*\* AND CONNECT 2 AND 3 MARKED

HFL-100A	
QTY / UNIT	MODEL USED ON
APPLICATION	
CODE	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES ON  
 DECIMALS X ± .05  
 XX ± .01  
 XXX ± .005

FRACTIONS ± 1/64  
 ANGLES ± 0°-30'

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
DIAGRAM SCHEMATIC OVER ALL HFL-100A				
FINAL APPROVAL		DATE		
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE		
DRAWN		DATE		
MATERIAL		G.D.L. 7-2-75		
FINISH		SIZE CODE IDENT NO. DWG NO.		
		D 82679 CK 2112		
SCALE		SHEET OF		

NOTICE TO PERSONS RECEIVING THIS DRAWING  
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.