


REQ. PER UNIT	USED ON			NP732	Ø
	MODEL	ASS'Y. NO.	DATE		
1	FSA-3		12-3-64		

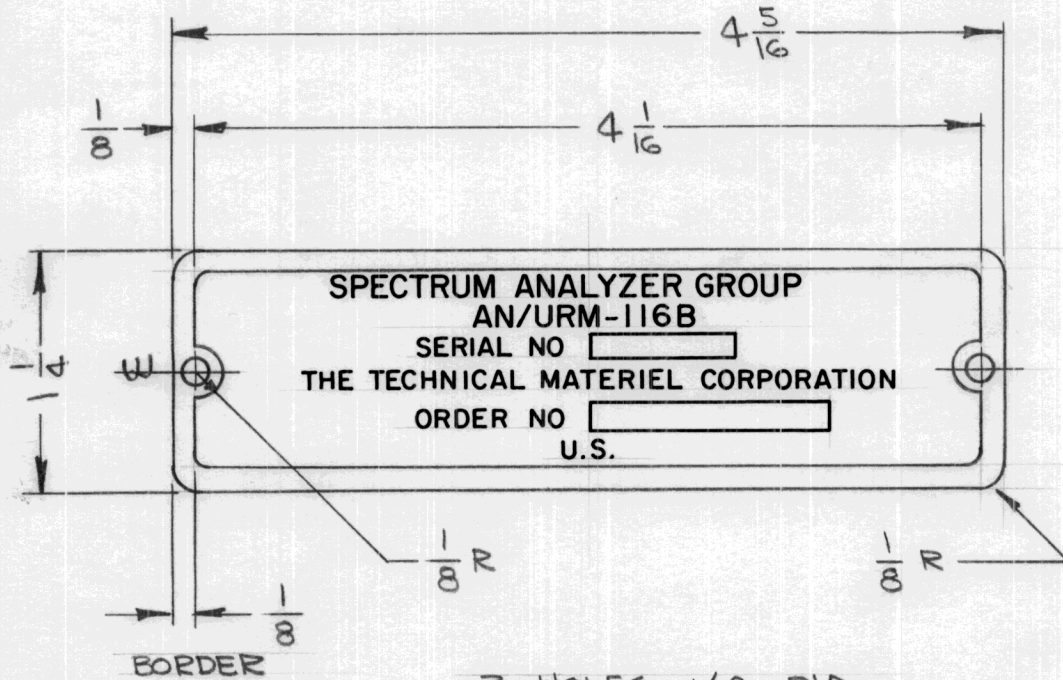

FINISH:
 REVERSE ETCH, ANODIZE ON LUSTERLESS
 BLACK BACKGROUND (TYPE 37038) PER
 FED. STD. NO. 595
 COLORLESS VARNISH PER MIL-V-6894

MINIMUM LETTER SIZE-3/64 HIGH

APPLICABLE ORDER AND SERIAL NUMBER WILL
 BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-
 STD-130 AND MIL-M-13231A AND AMENDS
 (REF: SIGNAL CORPS)

2 HOLES 1/8 DIA
 SERIAL NO. BLOCK 1/8 x 3/4
 ORDER NO. BLOCK 5/32 x 1-1/2

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
		.032 THK	THE TECHNICAL MATERIEL CORP.			
		STOCK SIZE	MAMARONECK. NEW YORK			
Ø	ORIGINAL RELEASE FOR PRODUCTION	12-11-64	Ø	RL	NAMEPLATE, IDENTIFICATION	
X	EXPER. RELEASE	12-3-64	X	4/Jan		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	1:1			
		5052-H32			G. Sanchez	CD
		TYPE & TEMPER	HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
		SEE NOTE				
		FINISH & SPEC. NO.				
						NP732
						Ø
DECIMALS		FRACTIONS		CODE		
.X ± .05		± 1/64		A		
.XX ± .01		ANGLES				
.XXX ± .005		± 0° 30'				
TOLERANCES						