


A4447

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	9-16-66	X	RME		
Ø	ORIGINAL RELEASE FOR PRODUCTION	9/23/66	Ø	EV		
A	ITEM 16 & 17 ADDED. NOTE 4 ADDED QTY ITEM 13 WAS 2 (1 CHGD TO IT. 16)	10-26-66	17133	WHD	<i>[Signature]</i>	<i>[Signature]</i>
B	DELE ITEM 5 & ADDED 4 ITEM 7'S. IT. 7 P/N WAS RC42GF221J. IT 6 WAS RC32GF101J	1-25-67	17661	RME	<i>[Signature]</i>	<i>[Signature]</i>
C	B/U UPDATED; NOTE TO CLARIFIED	2.13.67	17870	WHD	<i>[Signature]</i>	<i>[Signature]</i>

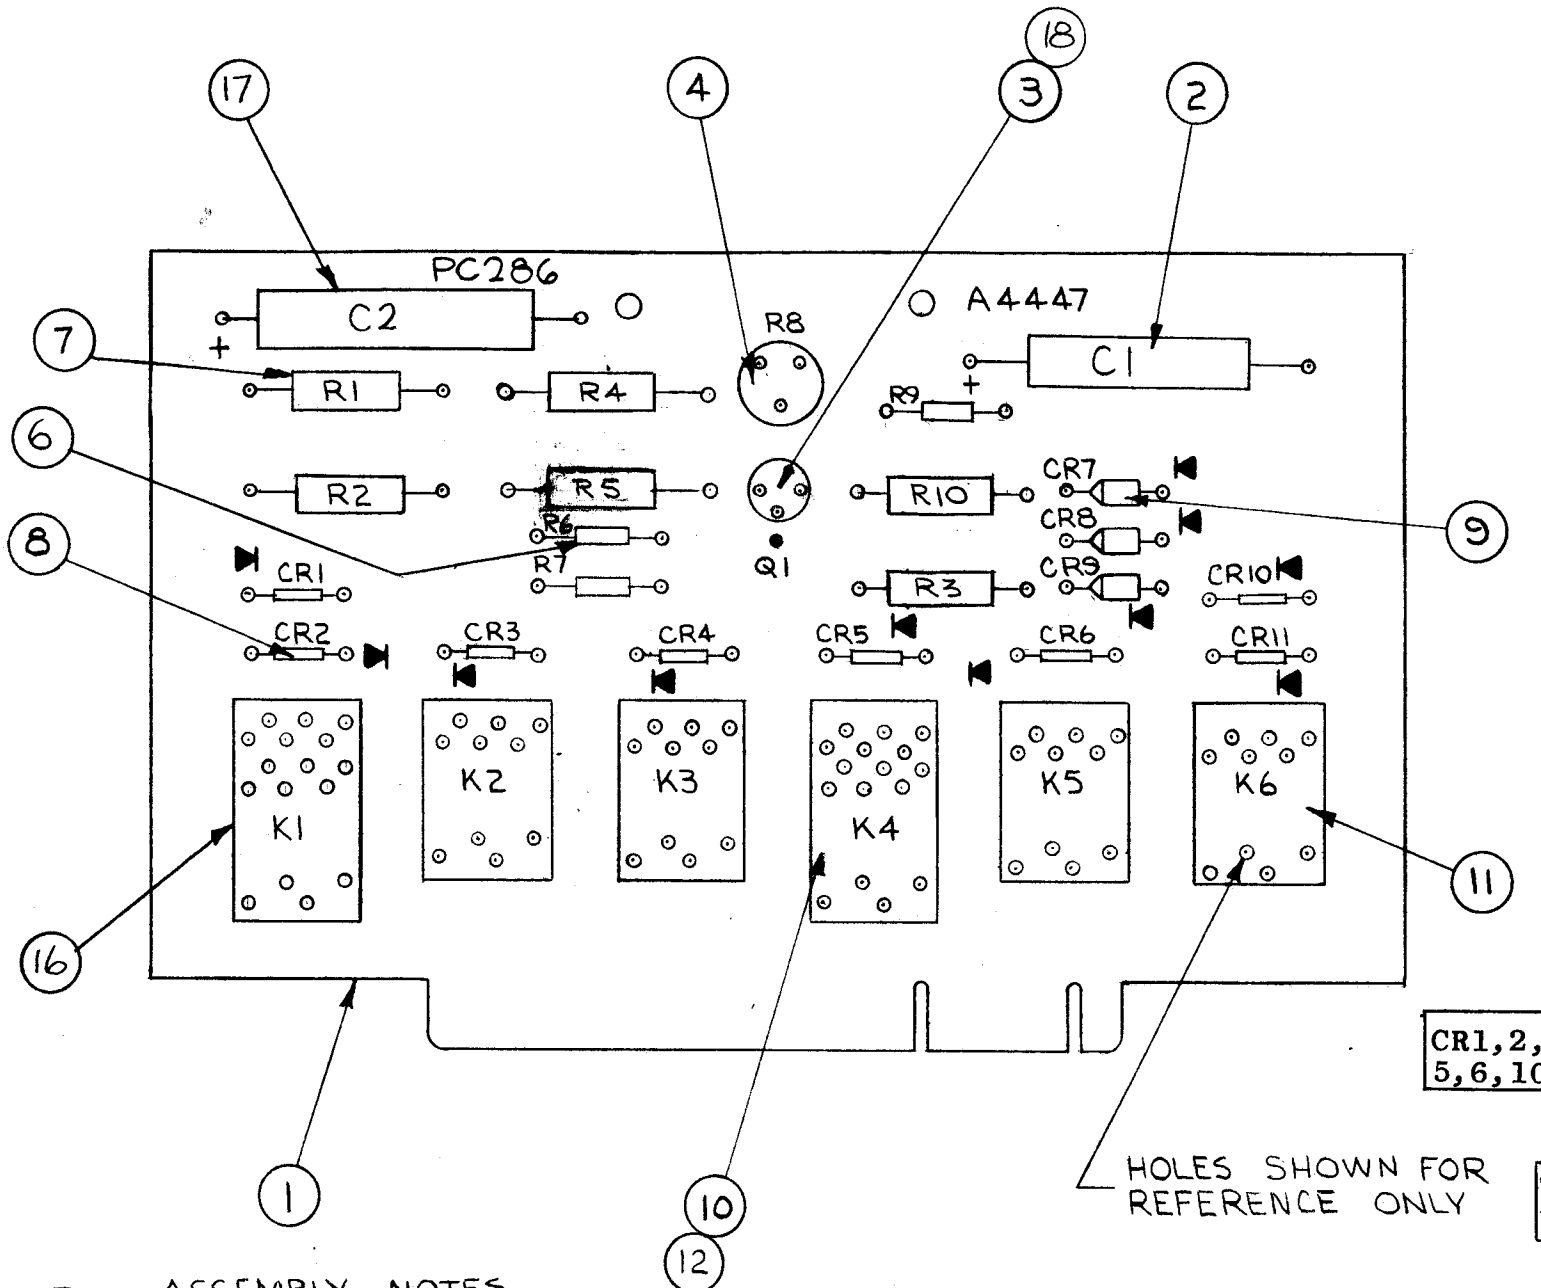

CR1,2,3,4
5,6,10,11

R1,R2,R3
R4,R5,R10

HOLES SHOWN FOR
REFERENCE ONLY

ASSEMBLY NOTES

- 1- TO MOUNT COMPONENTS, INSERT LEAD THROUGH PLATED THRU-HOLES.
- 2- USE CAUTION WHEN APPLYING HEAT & SOLDER TO LEAD & FOIL.
- 3- CLEAN & INSERT AS PER S-676
- 4- FUNGUS PROOFING AS PER TMC SPEC S113

NOTES

1	LRCA-1	
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
1	18	PXB29-3	PAD TRANSISTOR MTS	
1	17	CE105-50-50	CAPACITOR, FIXED, ELEC	C2
1	16	RL156-10	RELAY	K1
	15	BS100	SOLDER, TIN ALLOY	
3	14	RL156-1	RELAY	K2, 3, 5
1	13	RL156-9	RELAY	K6
1	12	RL156-2	RELAY	K4
4	11	TS171-5	SOCKET, RELAY	XK2,3,5,6
2	10	TS171-4	SOCKET, RELAY	XK1,4
3	9	1N2484	SEMICONDUCTOR DEVICE, DIODE	CR7, 8, 9
8	8	1N270	SEMICONDUCTOR DEVICE, DIODE	
6	7	RC42GF331J	RES, FXD, COMP	
3	6	RC32GF391J	RES, FXD, COMP	R6, 7, 9
	5	DELETED		
1	4	RV111-U-504A	RES, VARIABLE	R8
1	3	2N492	SEMICONDUCTOR DEVICE, DIODE	Q1
1	2	CE105-100-25	CAPACITOR, FXD, ELECT	C1
1	1	PC286	PRINTED CIRCUIT BOARD	

EATON		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH		TITLE ASSY. PRINTED CIRCUIT BOARD	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN RME CHECKED <i>[Signature]</i> ELECT. DES. <i>[Signature]</i> MECH. DES.	DATE 9-12-66 DATE 9/22/66 DATE FINAL APPROVAL <i>[Signature]</i> DATE 9/22/66 SHEET REV. LTR.
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005	TOLERANCES	FRACTIONS ± 1/64 ANGLES ± 0° 30'	A4447 C