
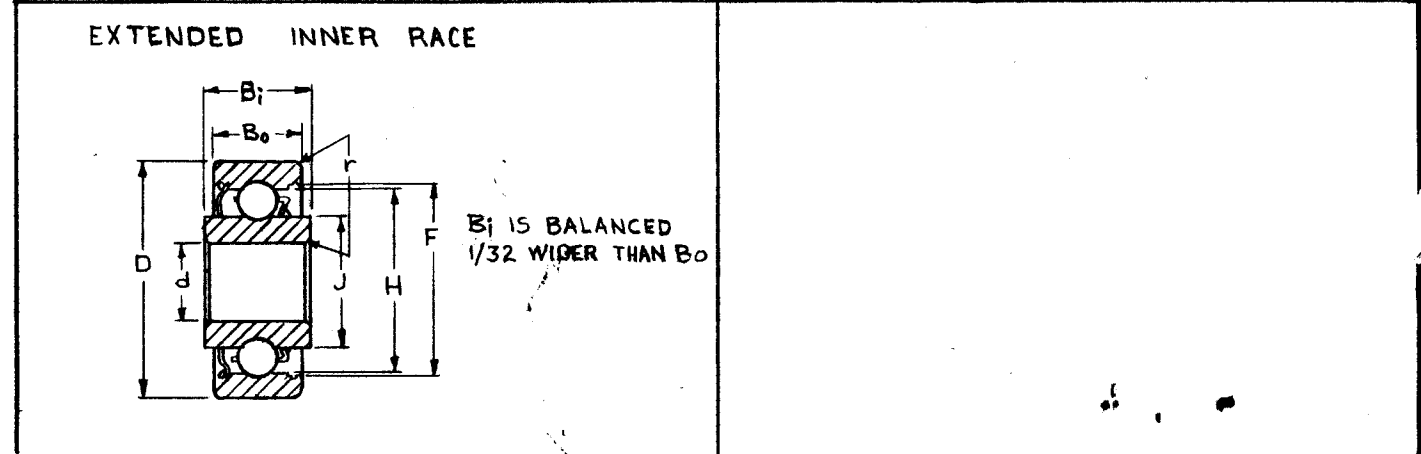


TMC PART NO.	MFG. PART NO.	TYPE	BORE d +.0000 -.0002	O.D. D +.0000 -.0003	WIDTH B +.000 -.001	SHIELD	O.D. D _f	WIDTH B _f	RADIUS R	MFG. CODE
BB126-1	SN16402Z	UNFLANGED	.2500	.6250	.1960	DOUBLE			.012	A
-2	SN1232A RCM3716ZZ	UNFLANGED	.1875	.5000	.1562	OPEN			.012	B
-3	SP08242Z	FLANGED	.1250	.3750	.1562	DOUBLE	.440	.030	.012	A
-4	SP12322Z	FLANGED	.1875	.5000	.1960	DOUBLE	.565	.042	.012	A
-5	SP16402Z	FLANGED	.2500	.6250	.1960	DOUBLE	.690	.042	.012	A
-6	DELETED USE BB126-9 SAME ITEM									
-7	SE10202Z	UNFLANGED	.1562	.3125	.1250	DOUBLE	.		.005	A
-8	SA0612	UNFLANGED	.0937	.1875	.0625	OPEN			.005	A
-9	SAF6242Z	UNFLANGED	.2500	.3750	.1250	DOUBLE			.005	A
-10	SA1224A2Z	UNFLANGED	.1875	.3750	.1250	DOUBLE			.005	A
-11	SA0620	UNFLANGED	.0937	.3125	.1094	OPEN			.005	A
-12	SA10202Z	UNFLANGED	.1562	.3125	.1250	DOUBLE			.005	A
-13	SE08162Z	UNFLANGED	.1250	.2500	.1094	DOUBLE			.005	A
-14	SC16242Z	FLANGED	.2500	.3750	.1250	DOUBLE	.422	.036	.005	A
BB126 -15	SA16322Z	UNFLANGED	.2500	.5000	.1250	DOUBLE			.005	A
-16	SFR6SS (TA)	FLANGED	.375	.875	.2812		.969	.061		C

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHK
D	COMPLETELY REVISED AND REDRAWN.	12.3.64	13041	92.	
E	ADDED -16 E C-5401 (REF CODE)	5.20.69	19445	GE	
F	-16 WIDTH B WAS .2188	4/10/70	19809	CV	

BB126

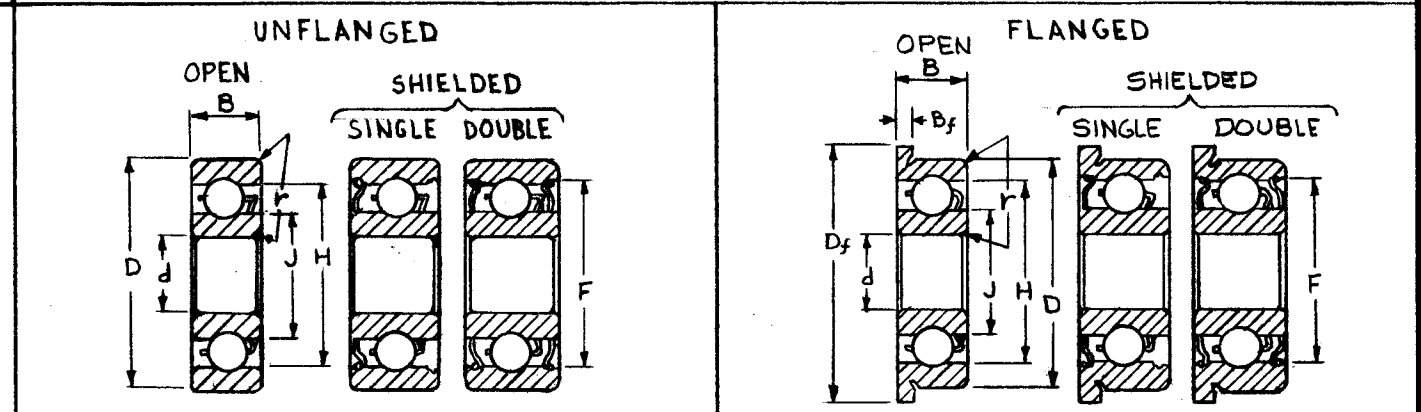

NOTES:
 CLASS: ABEC-3
 MATERIAL: STAINLESS STEEL
 RADIAL PLAY: .0002 TO .0005
 LUBE: PER MIL-6085A

STANDARD DRAWING

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	A. S401-351 C-S401-498 B. S401-352

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		RACE, BEARING		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>J. Luders</i> CHECKED <i>@</i>	DATE 12.3.64 DATE 12-9-64	FINAL APPROVAL <i>RJE</i> DATE SHEET
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES. MECH. DES.
NOTES		BB126		F
		SHEET		REV. LTR.