


REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
	X ₁	ITEM 1 WAS ITEM 2 & ITEM 2 WAS ITEM 1	3-23-65		G.D.L.	<i>[Signature]</i>
	Ø	ORIGINAL RELEASE FOR PRODUCTION	3-24-65		G.D.L.	<i>[Signature]</i>
B, F, 4	A	B/M: IT. 4: TO "J1303" WAS TO "P1302"; IT. 10: # 12 ADDED; IT. 12 ADDED, ON PICT. IT. 4 RELOC; ASSY NO. ADDED.	4-26-65	13930	P.Z.	<i>[Signature]</i>
	B	IT. 12 - J1303 WAS J1302 SHIELD PIN 11 WAS PIN 9	6-16-65	14242	D.V.V.	<i>[Signature]</i>
	C	IT. 4 # 12 DELETED, ALSO BREAKOUT # 4	9/23/65	14874	H.V.V.	<i>[Signature]</i>
	D	ITEM 1, 5, 6, 7 SHIELDS RELOC. ITS "TO" REVISED. ITEM 1, 2, & 3 SHORTENED.	1-6-67	17617	W.W.	<i>[Signature]</i>

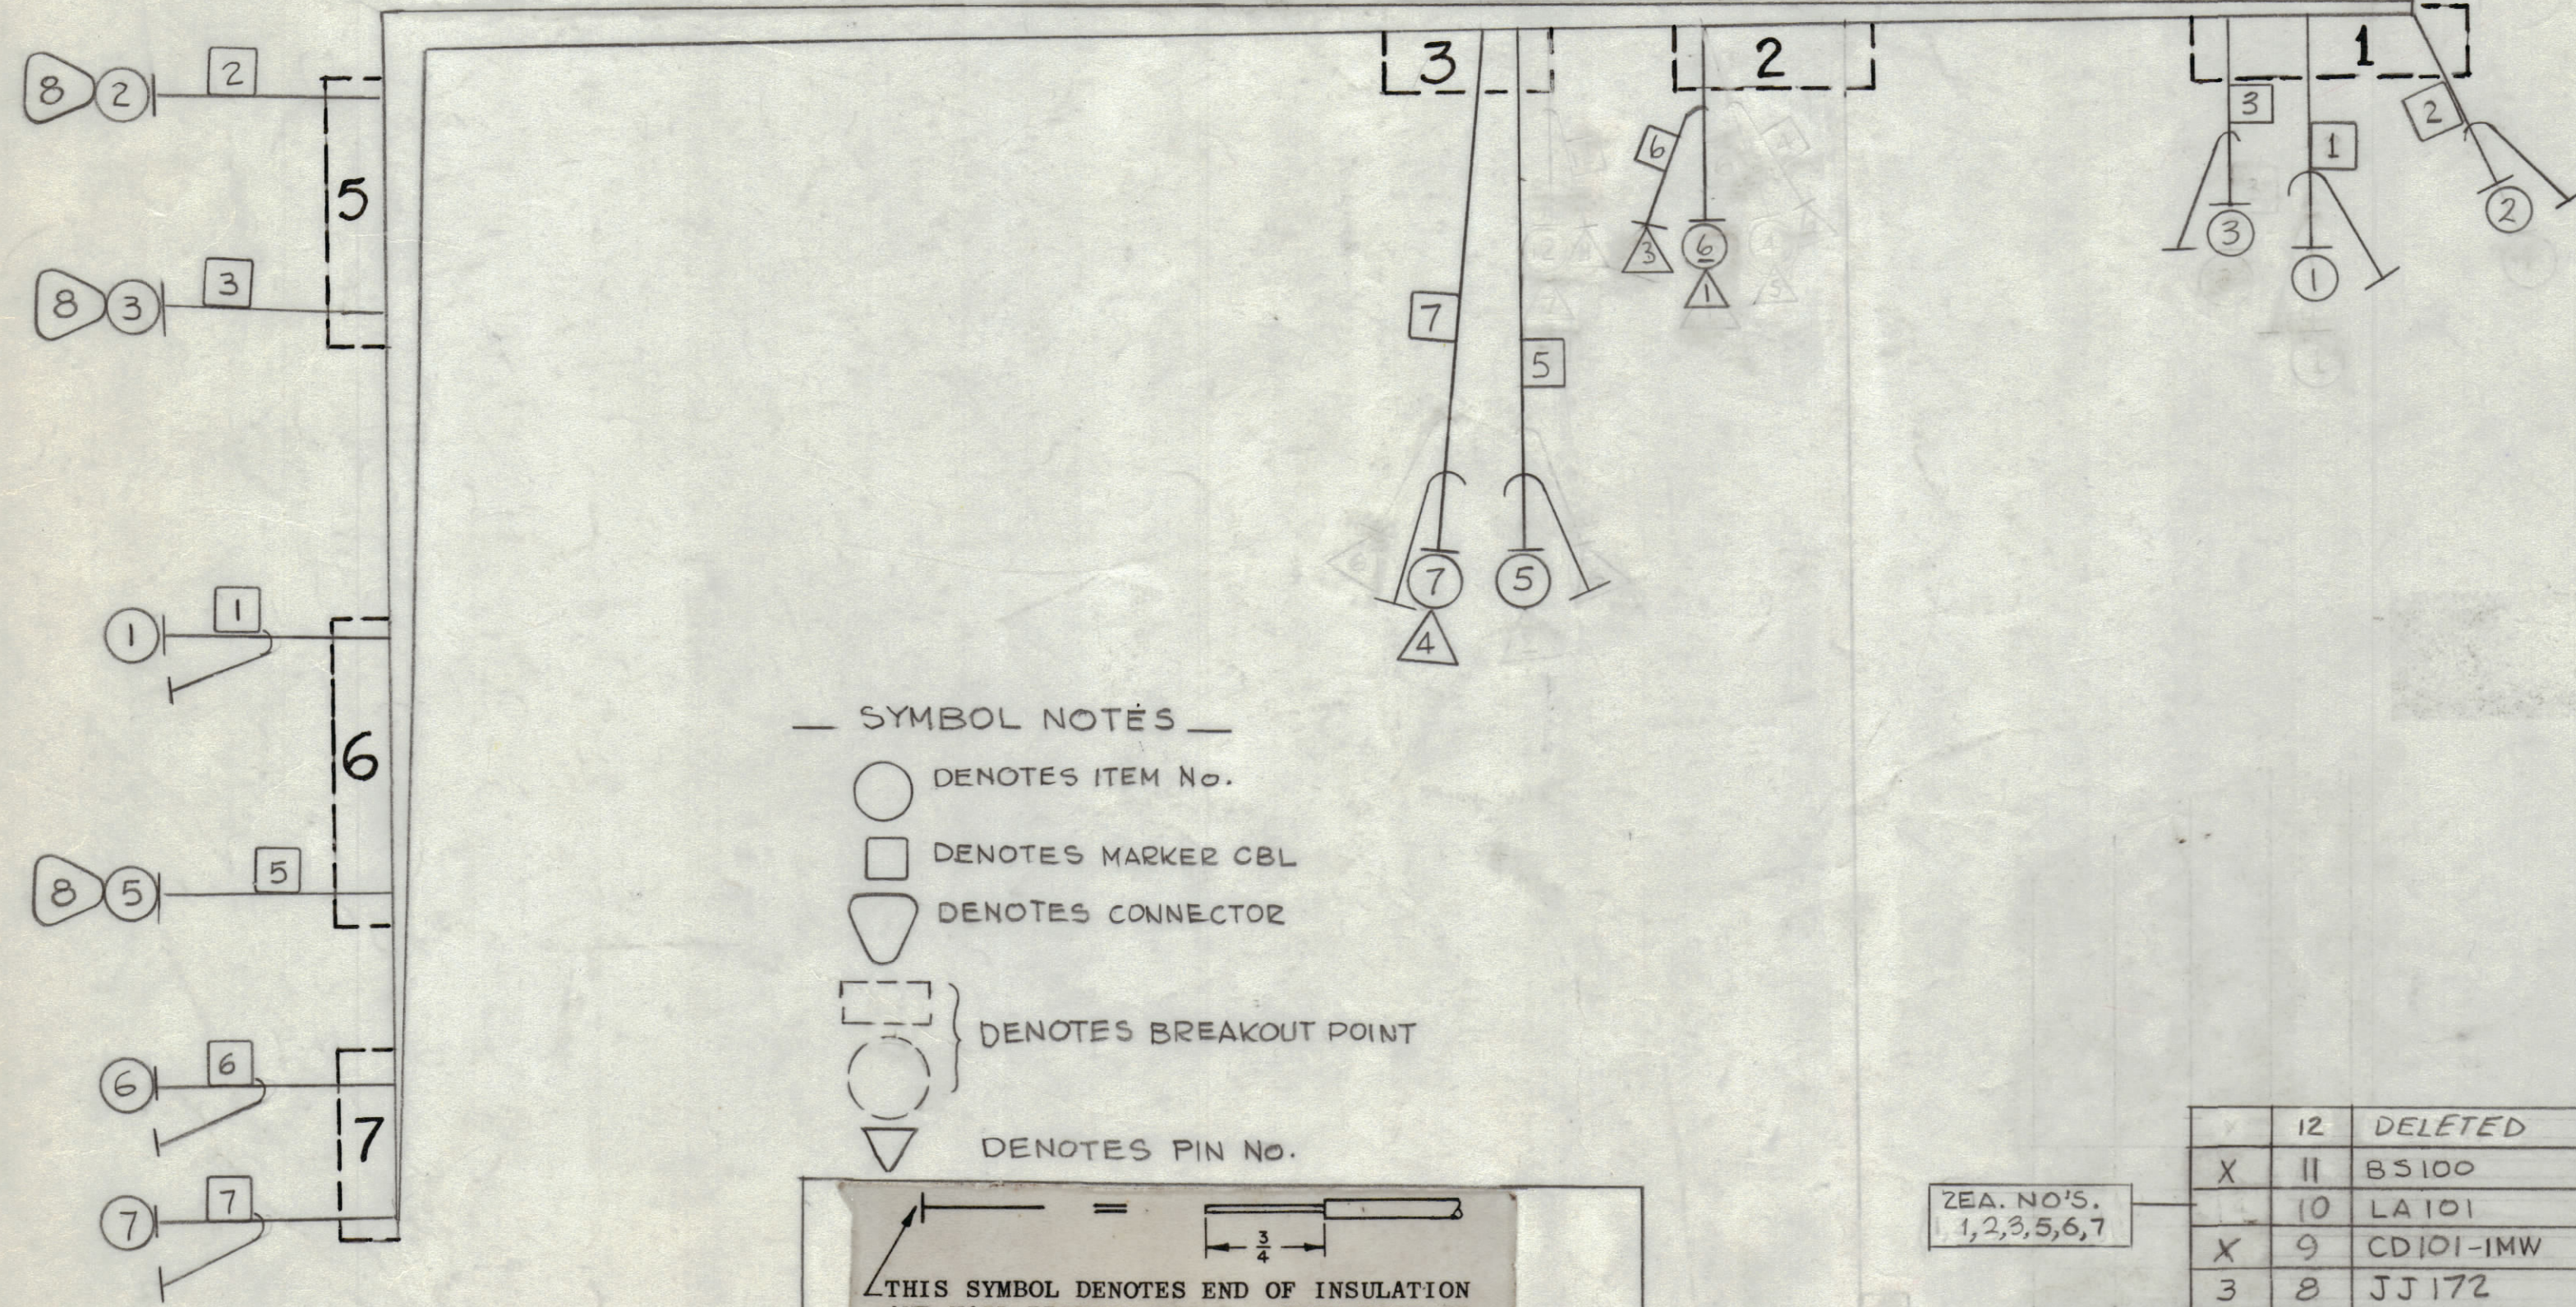

- SYMBOL NOTES —
- DENOTES ITEM No.
 - DENOTES MARKER CBL
 - ▽ DENOTES CONNECTOR
 - ⎓ DENOTES BREAKOUT POINT
 - (with triangle) DENOTES PIN No.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY

(1) ALL RF CABLES, (2) ALL SHIELDED CABLES, (3) ALL OTHERS. SPACE LACING APPROXIMATELY 3/4" APART.

NOTES

ZEA. NO'S.
1, 2, 3, 5, 6, 7

FROM	TO	REQ'D.	ITEM	PART NUMBER	FROM	DESCRIPTION	TO	SYMBOL
			12	DELETED				
X	11		BS100			SOLDER, TIN ALLOY		
			10	LA 101		BAND, MARKER, CBL		
X	9		CD101-1MW			CORD, NYLON LACING		
			8	JJ 172		CONNECTOR, RECP, RF, BNC		
7	3	X	7	RG174/U	KEY SHIELD TERM 2	J1303 CENTER PIN 4		
7	2	X	6		VOX CENTER TERM 4	J1303 SHIELD PIN 6		
6	3	X	5		J1304	STANDOFF SHIELD TO GRD		
			4	DELETED				
5	1	X	3	RG174/U		J1307	J1308	
5	1	X	2	RG174/U		J1310	J1311	
6	1	X	1	RG174/U		J1313	J1301	

BREAKOUT J. ANGER

LIST OF MATERIAL

MATERIAL	#	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
FINISH	#	TITLE WIRING HARNESS, BRANCHED (RE)
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	DRAWN G.D.L.	DATE 2-24-65
DECIMALS X ± .05 .XX ± .01 .XXX ± .005	CHECKED <i>[Signature]</i>	DATE 3/24/65
FRACTIONS ± 1/64 ANGLES ± 0° 30'	ELECT. DES. <i>[Signature]</i>	DATE 3/24/65
TOLERANCES	MECH. DES.	DATE
		DATE

FINAL APPROVAL *[Signature]* DATE

CA1045

REV. LTR. D

CHG-3 /CHGR-3 AX 556

QTY./UNIT SCALE 1:1

MODEL USED ON CODE A

ASS'Y. NO.

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

CA1045