


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
1	4	Item 12 Was 6-1/2; Item 13 Was 9-3/4	12-6-62	139	J. L.	[Signature]	[Signature]
2	3	Item 37 Was 10-1/4; Item 38 Was 11-1/4					
3	2	Item 9 Was 12; Item 10 Was 12					
4	1	Item 42 Was 8-1/4					

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

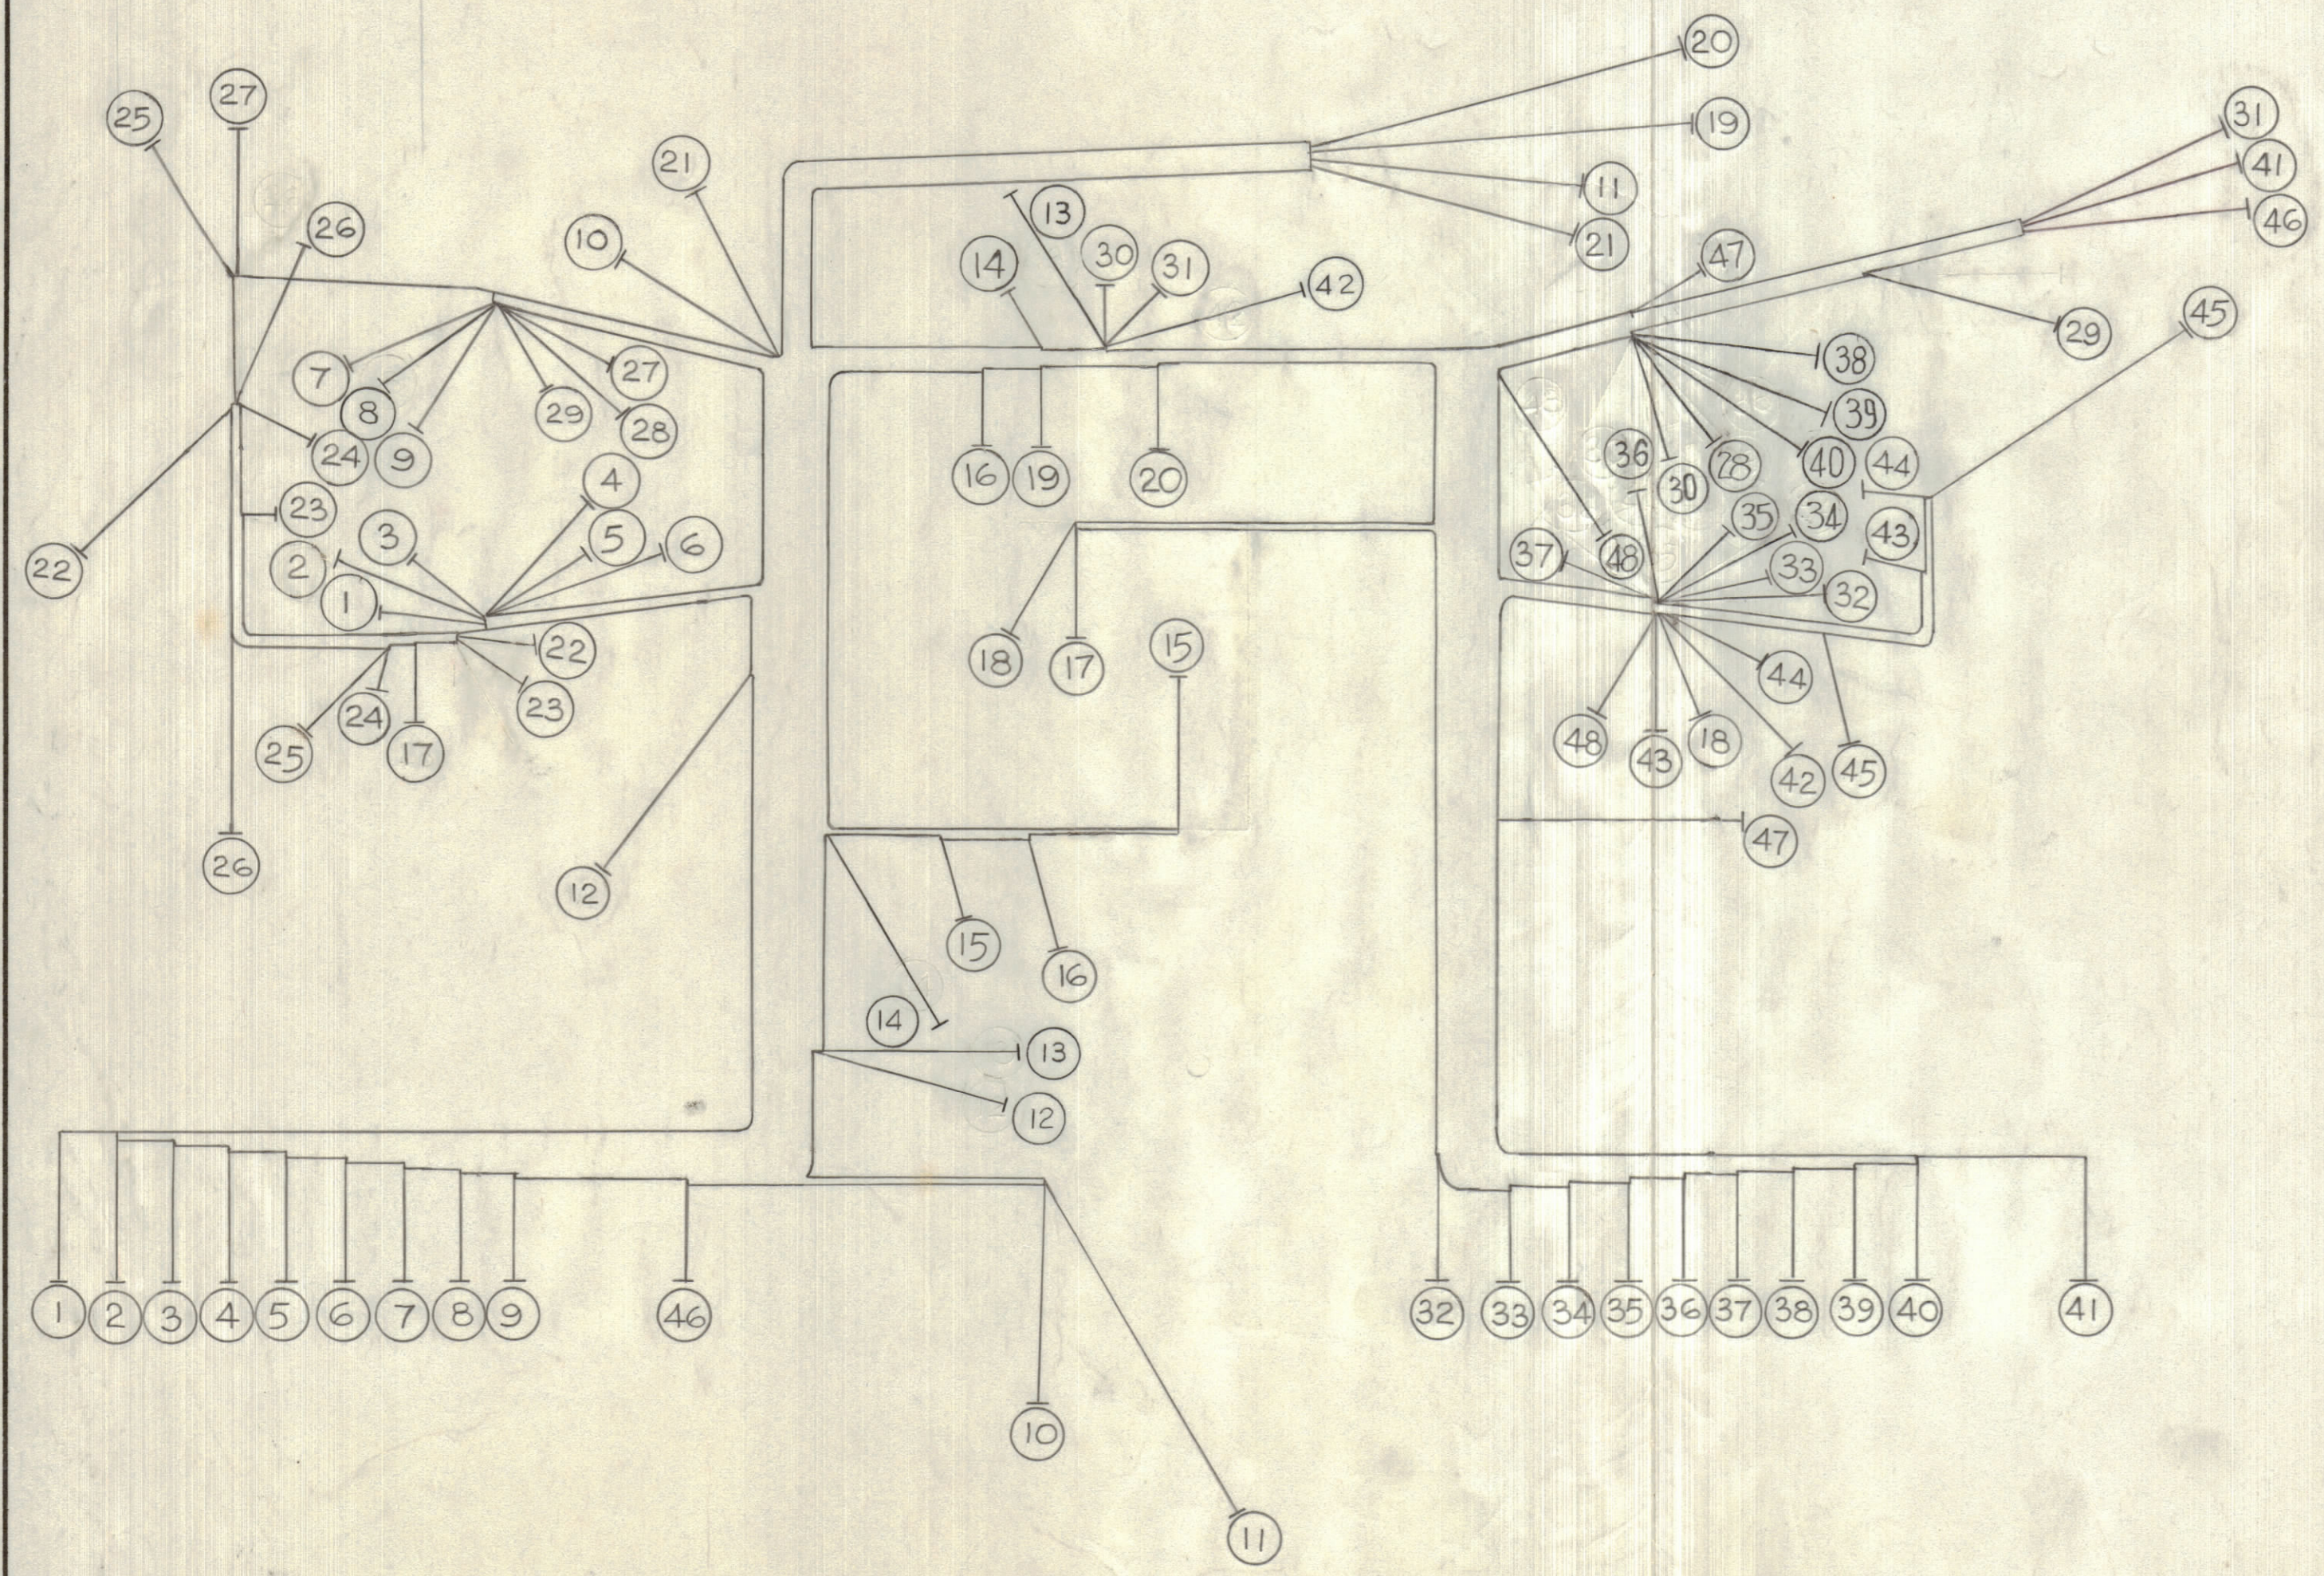

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
13 1/4	1	MWC22(7)U 0	Wire: black	
13 1/4	2	MWC22(7)U 8	Wire: grey	
12 1/4	3	MWC22(7)U 93	Wire: white/orange	
12	4	MWC22(7)U 5	Wire: green	
11 1/4	5	MWC22(7)U 1	Wire: brown	
11 1/4	6	MWC22(7)U 91	Wire: white/brown	
12 1/4	7	MWC22(7)U 92	Wire: white/red	
12	8	MWC22(7)U 4	Wire: yellow	
12	9	MWC22(7)U 94	Wire: white/yellow	
11 1/4	10	MWC18(16)U 9	Wire: white	
17 1/4	11	MWC18(16)U 9	Wire: white	
6 3/4	12	MWC22(7)U 1	Wire: brown	
10 3/4	13	MWC22(7)U 1	Wire: brown	
7 1/4	14	MWC22(7)U 3	Wire: orange	
5	15	MWC22(7)U 5	Wire: green	
8 1/4	16	MWC22(7)U 3	Wire: orange	
14	17	MWC22(7)U 2	Wire: red	
7 1/4	18	MWC22(7)U 2	Wire: red	
10 1/4	19	MWC18(16)U 8	Wire: grey	
11 1/4	20	MWC18(16)U 8	Wire: grey	
9 1/4	21	MWC18(16)U 9	Wire: white	
6 1/4	22	MWC22(7)U 95	Wire: white/green	
5	23	MWC22(7)U 92	Wire: white/red	
5	24	MWC22(7)U 2	Wire: red	
7	25	MWC22(7)U 0	Wire: black	
5 1/4	26	MWC22(7)U 94	Wire: white/yellow	
5 1/4	27	MWC22(7)U 90	Wire: white/black	
11	28	MWC22(7)U 95	Wire: white/green	
12 1/4	29	MWC22(7)U 1	Wire: brown	
7	30	MWC22(7)U 90	Wire: white/black	
9 1/4	31	MWC22(7)U 91	Wire: white/brown	
8 1/4	32	MWC22(7)U 0	Wire: black	
8 1/4	33	MWC22(7)U 8	Wire: grey	
8 1/4	34	MWC22(7)U 93	Wire: white/orange	
8 1/4	35	MWC22(7)U 5	Wire: green	
9 1/4	36	MWC22(7)U 1	Wire: brown	
10 3/4	37	MWC22(7)U 91	Wire: white/brown	
11 1/4	38	MWC22(7)U 92	Wire: white/red	
12 1/4	39	MWC22(7)U 4	Wire: yellow	
12 1/4	40	MWC22(7)U 9	Wire: white	
17	41	MWC22(7)U 95	Wire: white/green	
9	42	MWC22(7)U 1	Wire: brown	
4 1/4	43	MWC22(7)U 92	Wire: white/red	
5 1/4	44	MWC22(7)U 2	Wire: red	
6 1/4	45	MWC22(7)U 0	Wire: black	
17 1/4	46	MWC22(7)U 3	Wire: orange	
7 1/4	47	MWC22(7)U 94	Wire: white/yellow	
6 1/4	48	MWC22(7)U 95	Wire: wh./green	

CA10139

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4 INCH BEYOND THIS POINT AND TINNED 1/4 INCH UNLESS OTHERWISE SPECIFIED. 3/4 INCH HAS BEEN ADDED TO BILL OF MATERIAL.

WIRE SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN, SPACE LACING APPROX. 3/4 INCH APART.

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MID-1	E1147-P	MAY 9/61
MODEL	PROJECT NO.	DATE
	ASS'Y. NO.	

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		HARNESS	
WEIGHT PER FC.		MID-1	
TYPE & TEMPER		JPC	M. W.
		DBAWN	ELEC. DES. APP.
		MECH. DES. APP.	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10139	