


SYMBOL NOTES

- DENOTES ITEM NO.
- ⬡ DENOTES LUG
- ▽ DENOTES PIN NO.
- ◁ DENOTES CONNECTOR

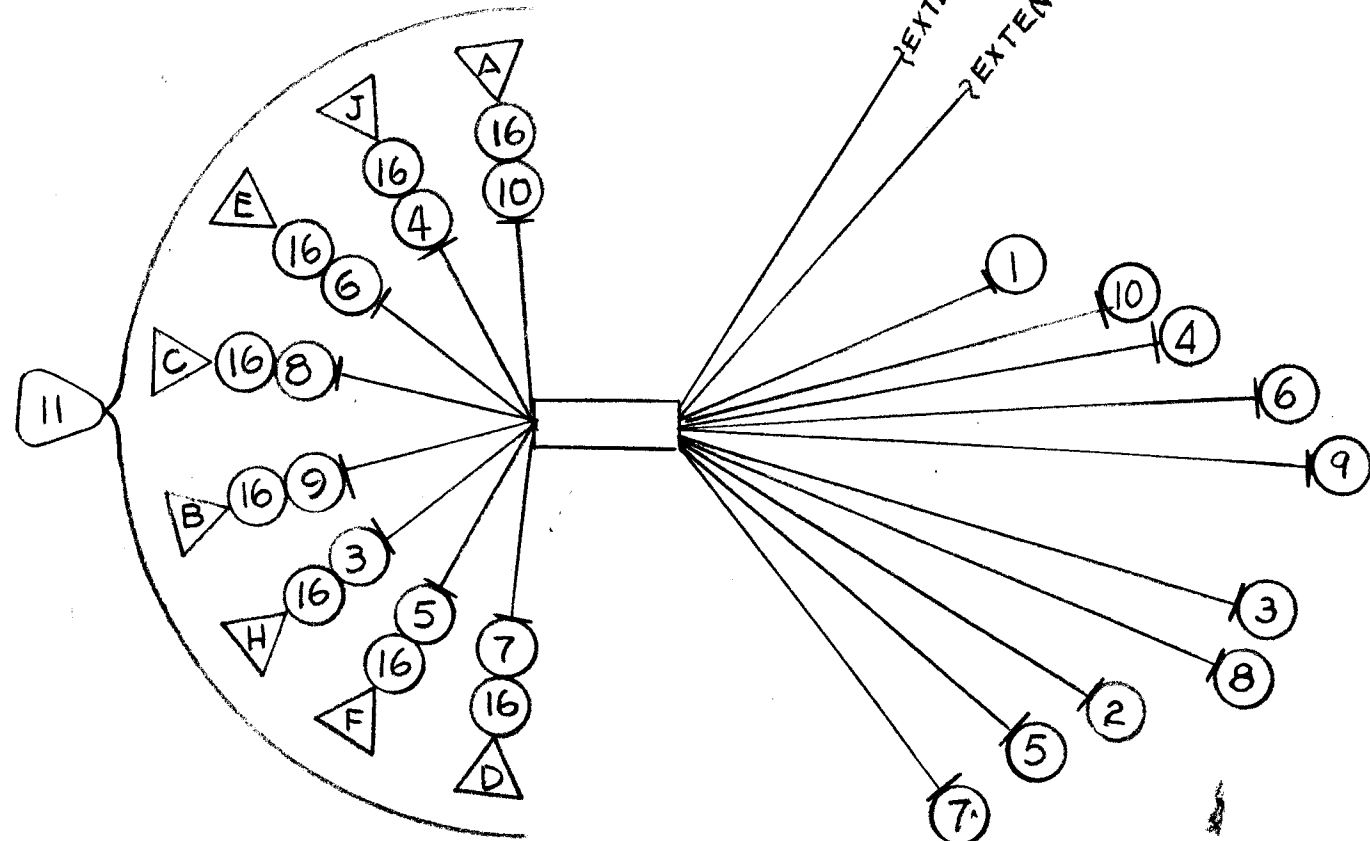

CA946 A

REVISIONS					
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD APPD
X	EXPER. RELEASE	12-15-64		G.D.L.	
X ₁	ITEM 12 (PLATE MTC) DELETED	1-6-64		G.D.L.	
0	ORIGINAL RELEASE FOR PRODUCTION	2-5-65		R.F.	JCS 1
A	LUG 13 IT. 15' 2 12" WAS 7", IT. 2, 3, 8, 9 RELOCATED IT. (5) PIN 2 WAS 3, (6) PIN 8 WAS 9, (7) PIN 3 WAS 2, (8) PIN 9 WAS 8	6-21-65	14285	D.V.V.	JCS 2

X	16	PX830-18-1	INSULATION, SLEEVING-SHRINK	BLK
X	15	BS100	SOLDER, TIN ALLOY	
X	14	CD101-1MW	CORD, NYLON, LACING	
2	13	TE120-2	TERMINAL, LUG-SPADE	
	12	DELETED		
1	11	JJ193-9P	CONNECTOR, RECEPTACLE, MALE	
	10	MWC22 (7) U8	JJ193-9P PIN A	SW120-PIN 11
	9	0	JJ193-9P PIN B	SW120 PIN 5
	8	5	JJ193-9P PIN C	SW120-PIN 9
	7	7	JJ193-9P PIN D	SW120 PIN 3
	6	4	JJ193-9P PIN E	SW120 PIN 8
	5	1	JJ193-9P PIN F	SW120 PIN 2
	4	9	JJ193-9P PIN J	SW120 PIN 10
	3	3	JJ193-9P PIN H	SW120 PIN 4
	2	6	AZ104, TB2, TERM 8	SW120 PIN 1
	1	MWC22 (7) U2	AZ104, TB2, TERM 6	SW120 PIN 2

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN. SPACE LACING APPROXIMATELY 3/4" APART.

NOTES

2	BSP-6	A3740
Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE 1:1	CODE A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	FROM	DESCRIPTION	TO	SYMBOL
O POSE LIST OF MATERIAL						
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH			TITLE WIRING HARNESS, BRANCHED			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN G.D.L.	DATE 12-15-64	FINAL APPROVAL DATE	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			CHECKED JCS	DATE	DATE	
FRACTIONS ± 1/64 ANGLES ± 0° 30'			ELECT. DES.	DATE	DATE	
TOLERANCES			MECH. DES.	DATE	DATE	
			SHEET		REV. LTR.	