THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE FOR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CL-317
2	TTR-10	AX-418	5-25-63	

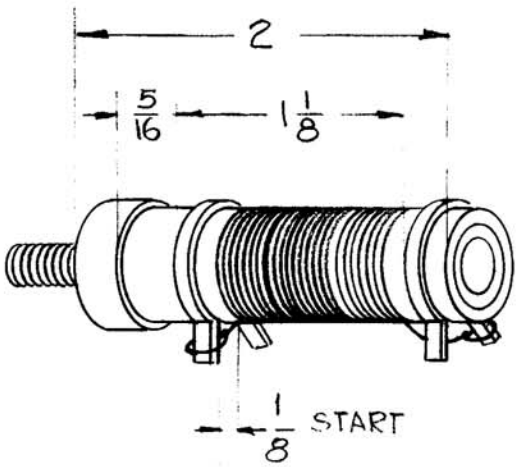

WINDING INFORMATION

1. 68 TURNS, CLOSEWOUND, SINGLE LAYER
2. HOLLOW COIL FORM, MATERIAL - PHENOLIC XXXP
3. CORE - POWDERED IRON

ELECTRICAL SPECIFICATIONS

INDUCTANCE L = 180 uh (170-190 uh)

Q = 85 OR GREATER

FREQUENCY = 790 KC

D.C. RESISTANCE - NOT RATED

CURRENT RATING - NOT RATED



SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

DECIMALS .X ±.05 .XX ± .01 .XXX ±.005 TOLERANCES FRACTIONS ± 1/64 ANGLES ± 0° 30'

CODE A

2A-3172

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

R. KOHN

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

COIL, RF FIXED

DRAWN	CHECKED	FINAL APPROVAL
G.D.L		BP

ELEC. DES. APP.	MECH. DES. APP.	
RON KOHN 6/11/63	W.A.P	CL-317

OGILVIE PRESS, INC., BROOKLYN 17, N. Y. REPROVEL NO. 400H 3787