
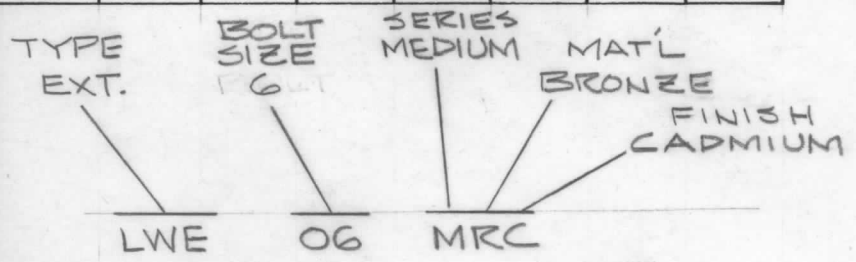


BOLT SIZE	SIZE CODE	LIGHT			* MEDIUM		
		T	O.D. MAX.	O.D. MIN.	T	O.D. MAX.	O.D. MIN.
4	04				.015 .019	.260	.245
5	05				.015 .019	.280	.270
6	06				.016 .022	.320	.305
8	08				.018 .023	.381	.365
10	10				.020 .025	.410	.395
12	12				.023 .028	.475	.460
1/4	25	.018 .023	.375	.365	.023 .028	.510	.494
5/16	31				.028 .034	.610	.588
3/8	37	.032 .040	.625	.615	.032 .040	.694	.670
7/16	43	.032 .040	.715	.700	.032 .040	.760	.740
1/2	50				.037 .045	.900	.880

REQ. PER UNIT	USED ON			LWE ---	B
	MODEL	ASS'Y. NO.	DATE		

- SERIES
L - LIGHT
M - MEDIUM
H - HEAVY
- MATERIAL
R - BRONZE
S - STEEL
S - STAINLESS
- FINISH
C - CADMIUM
N - BRIGHT NICKEL
S - PASSIVATE (STAINLESS ONLY)
B - BLACK NICKEL
L - DO NOT USE (WAS SILVER)
P - SILVER

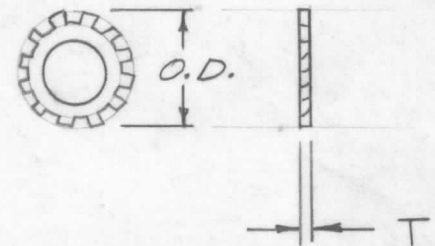

* STANDARD SERIES

STANDARD DRAWING

REQ.	ITEM	PART NO.	DESCRIPTION			SYMBOL
			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
			LOCKWASHER, EXTERNAL TOOTH			
B	REDRAWN REPLACED BY REV "B" CHART UPDATED.	1/14/64	10690	HA	⊕	W/E
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE				
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES		FRACTIONS ± 1/64 ANGLES ± 0° 30'		
		CODE				
		TYPE & TEMPER		HEAT TREAT. SPEC.		DRAWN
		FINISH & SPEC. NO.		ELEC. DES. APP.		MECH. DES. APP.
				LWE ---		B