




IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		PROD RELEASE	1 FEB 72	1234	LB		

REQ	ITEM	PART NO.	DESCRIPTION	USED ON	REMARKS
2	1	NT10002-3	NUT, CLINCH #8-32	MS11416	B HOLE

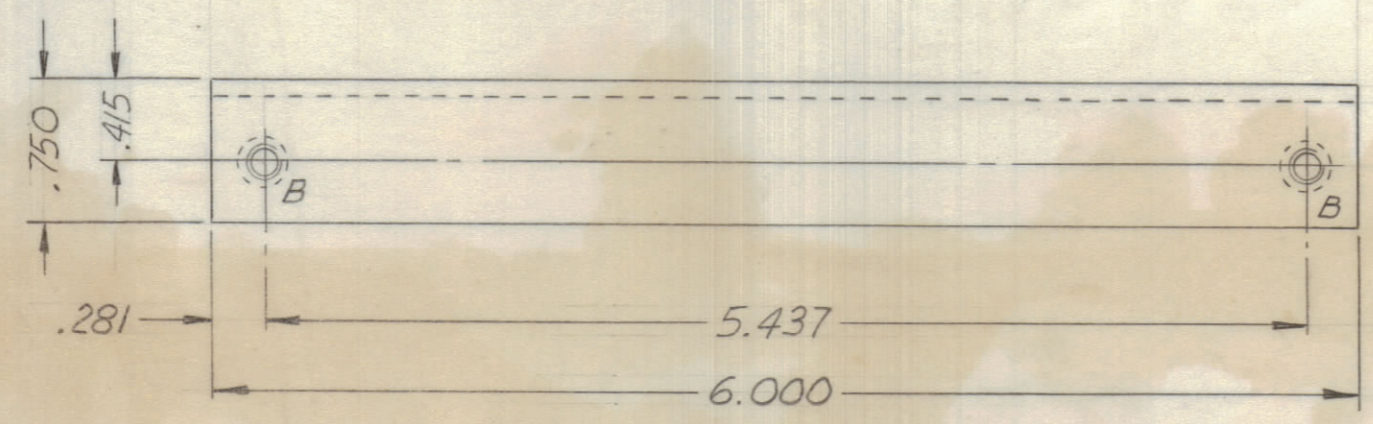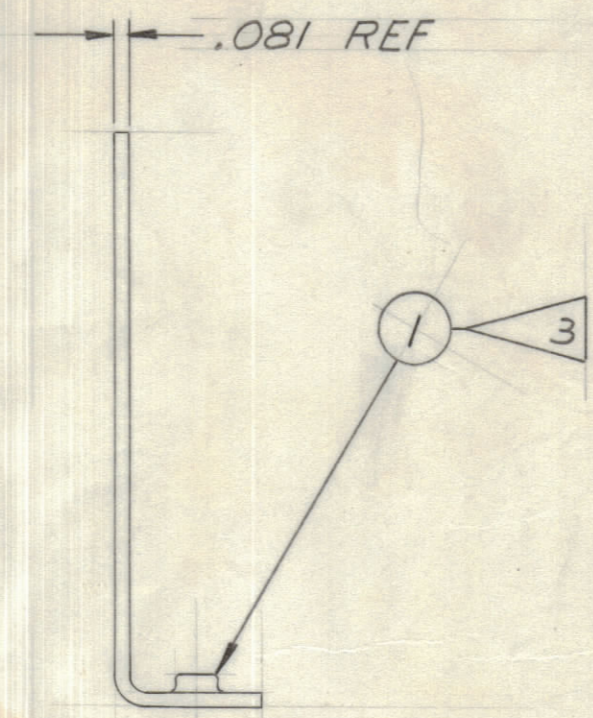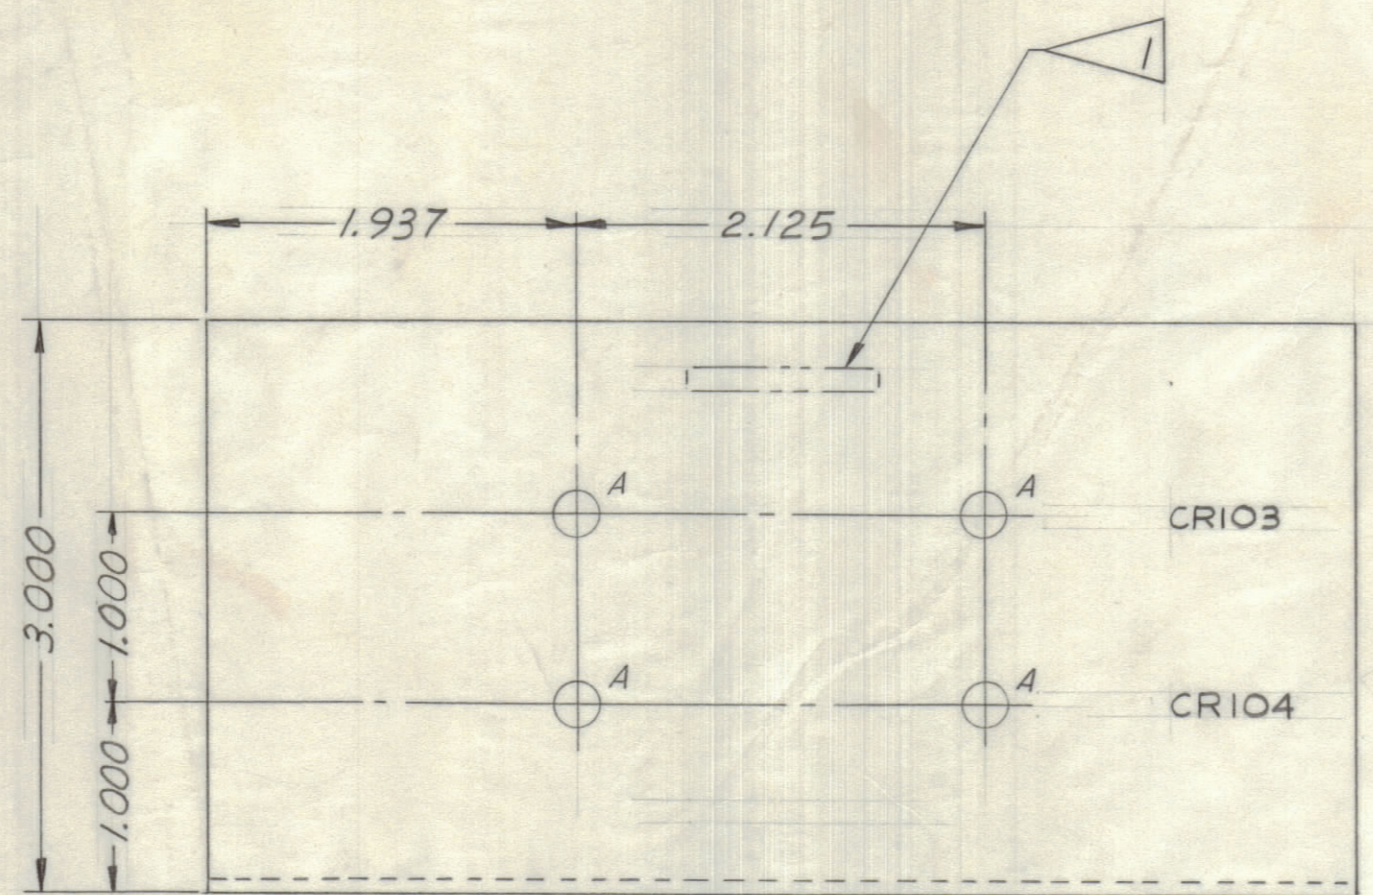

MS11416 Ø

HOLE	DESCRIPTION	QTY
A	.234 DIA	4
B	.290/.293 DIA	2

THIS PART TO BE USED FOR MOD KIT 10045 ONLY
 3. INSTALL AFTER FINISHING

2. MINIMUM INSIDE BEND RADIUS .081

1. METAL STAMP TMC PART NO 11/B HIGH GOTHIC IN APPROX POSITION SHOWN

NOTES

REF : LD10471

.081 THK		TMC (Canada) LIMITED	
STOCK SIZE		OTTAWA ONTARIO	
AL ALY		BRACKET	
MATERIAL	WEIGHT PER PC.	RECTIFIER MTG.	
575 H32		L. BROWN	
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
			MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
IRIDITE S404			MS11416 Ø
FINISH & SPEC. NO.			

TOLERANCES			SCALE: 1/1
ALL OTHERS	DEC DIM ± .015	XX-Ø	DRILL, PUNCH, COMMERCIAL STOCK
	FRAC DIM ± 1/100	XX-Ø	SIZES AND MANUFACTURERS
	ANGULAR DIM ± 0° 30'	.XXX-000	TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
PSP-500	142/72	A11037	1 FEB 72