HOLES —

A - 13/64 DIA. (4 REQ.)

B - 3/8 DIA. (2 REQ.)

C - 15/64 DIA. (4 REQ.)

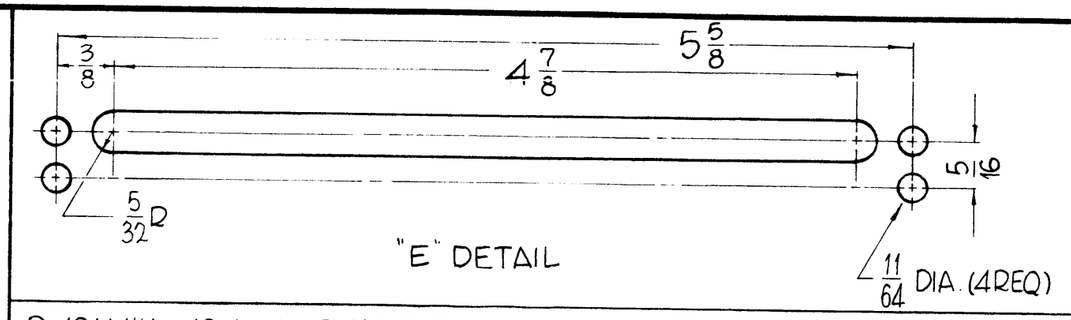

D - .191 MIN., .194 MAX. DIA'S. FOR MTG. ITEM NO. 1, NT-129-632-4 (14 REQ.)

O

MS-3225

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
O	ORIGINAL RELEASE FOR PRODUCTION	5-28-64	O	A.M.		

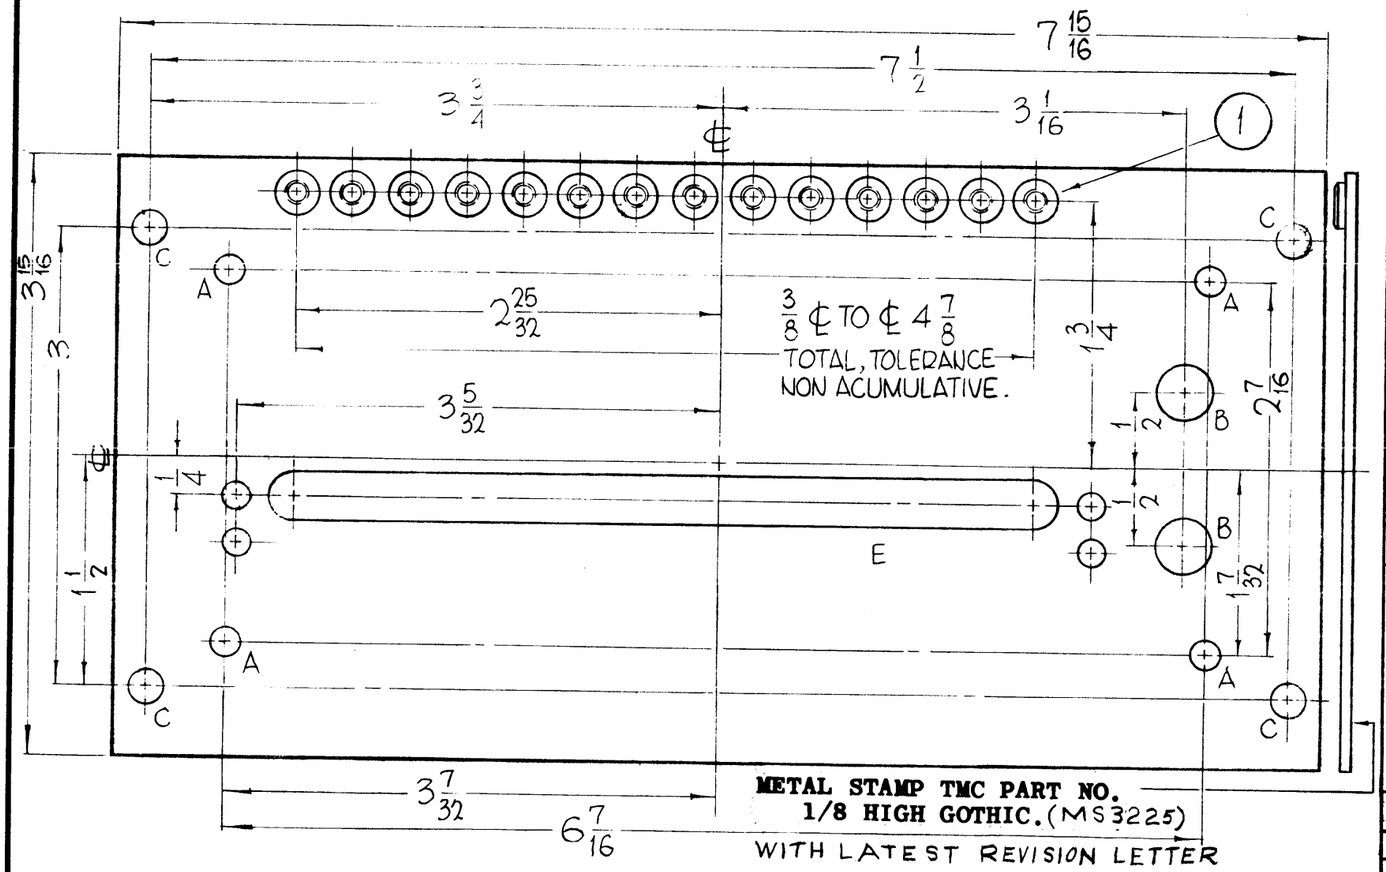

UNLESS OTHERWISE SPECIFIED:

1. **USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.**
2. **ALL ANGULAR BENDS 90°.**
3. **REMOVE ALL BURRS AND SHARP EDGES.**
4. **MOUNT INSERTS AFTER FINISHING.**

REF - TMC DWG. NO. LD-1235

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
14	1	NT-129-632-4	NUT, ROUND, SWAGE TYPE	

F. BUDETTI

LIST OF MATERIAL

FINISH -

S404 - IRIDITE, 14-2 AL-COAT

S114 - ZINC CHROMATE PRIMER } FRONT AND EDGES ONLY

S220 - RCAF GRAY SEMI-GLOSS ENAMEL FINISH. } FRONT AND EDGES ONLY

NOTES

Q'T'Y./UNIT	MODEL USED ON	ASS'Y. NO.
1	GPT-200K	AX-392

SCALE | CODE

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MATERIAL: .081 THICK, ALUMINUM, 5052 - H-32

FINISH: SEE NOTES

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES: DECIMALS .X ± .05, .XX ± .01, .XXX ± .005; FRACTIONS ± 1/64; ANGLES ± 0° 30'

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: PLATE, TERMINAL MOUNTING

DRAWN: John C. Biele	DATE: 12-1-62	FINAL APPROVAL: RJC	DATE
CHECKED: OA	DATE		
ELEC. DES.	DATE		
MECH. DES. 2/3/64	DATE	SHEET	REV. LTR.

MS-3225 | O

TMC FORM 109