


REQ. PER UNIT	USED ON		
	MODEL	ASS'Y. NO.	DATE
1	GPT200K	AR137	5.6.65
1	GPT200K	AR138	5.6.65

MS4576 Ø

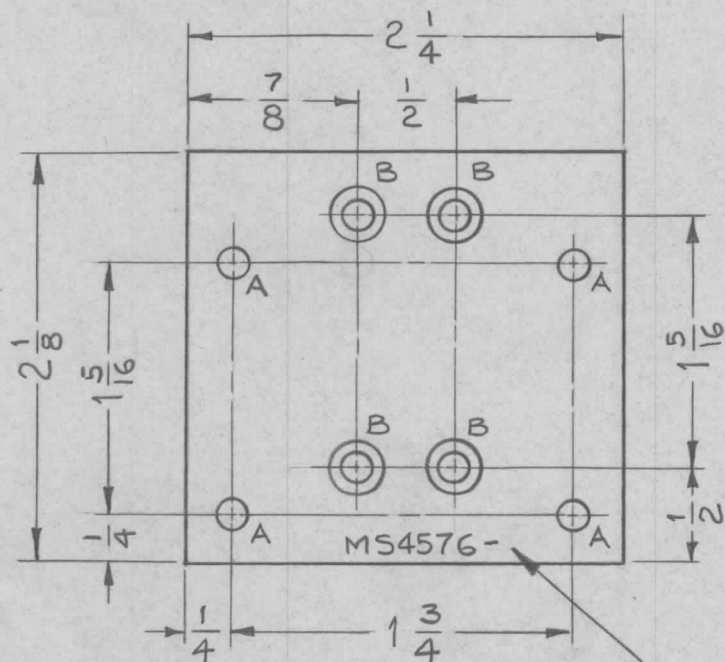

HOLES:

REQ

- A ~ 11/64 DIA _____ 4
 B ~ DRILL .144 DIA C'SINK 82° TO .284 DIA - 4

NOTE:

REMOVE ALL BURRS & SHARP EDGES

METAL STAMP TMC P/N 1/8 HIGH GOTHIC, WITH LATEST REV. LETTER

REQ.	ITEM	PART NO.	F. BUDETTI	DESCRIPTION	SYMBOL
		1/8 THK		THE TECHNICAL MATERIEL CORP.	
		STOCK SIZE		MAMARONECK, NEW YORK	
Ø		ALUMINUM		PLATE, MTG., RELAY	
		MATERIAL			
		5052-H32	<i>hbs</i>	<i>MS</i>	
		TYPE & TEMPER		CHECKED	
		HEAT TREAT. SPEC.		FINAL APPROVAL	
		S404 YEL. IRIDITE	<i>aa</i>		MS4576 Ø
		FINISH & SPEC. NO.		ELEC. DES. APP.	MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

DECIMALS .X ± .05 .XX ± .01 .XXX ± .005

FRACTIONS ± 1/64 ANGLES ± 0° 30'

TOLERANCES

CODE A

ORIGINAL RELEASE FOR PRODUCTION 5/16/67 Ø CV *JD*