REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	7/10/69		CV		

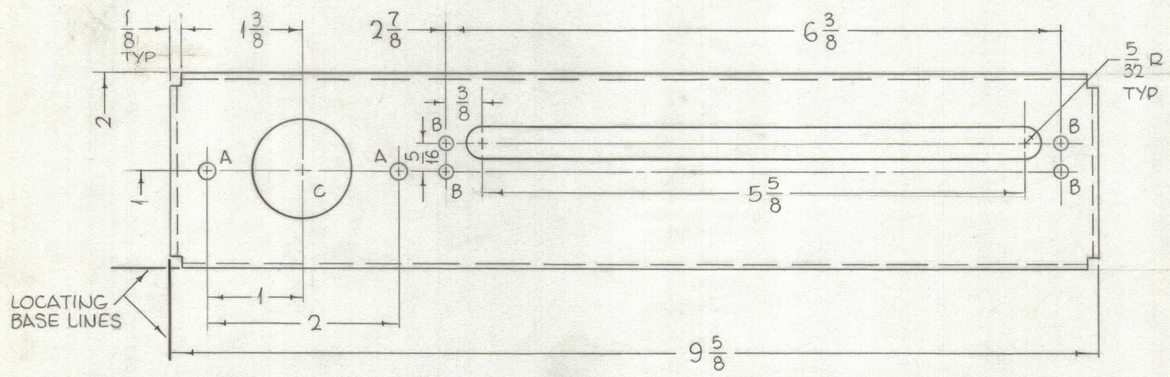

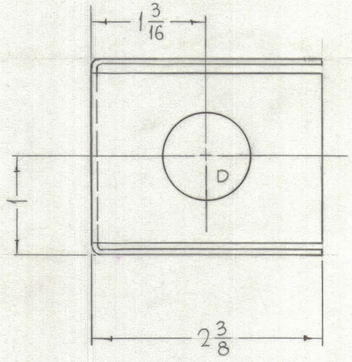

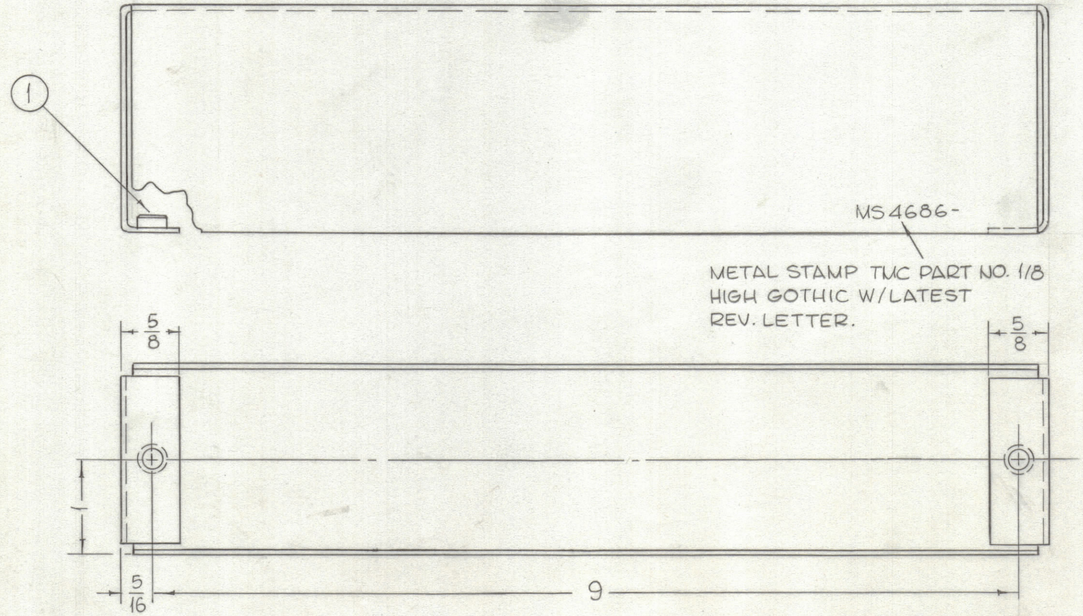

METAL STAMP TMC PART NO. 1/8 HIGH GOTHIC W/LATEST REV. LETTER.

HOLES	REQ.
A-5/32 DIA.	2
B-1/8 DIA.	4
C-1" DIA.	1
D-7/8 DIA.	1
E-.191-.194 DIA.	2

REF-TMC DWG. LD1970

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
2	1	NT129-632-4	NUT, PLAIN, SPLINE	

STURMER — LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS
2. ALL ANGULAR BENDS 90 DEGREES
3. REMOVE ALL BURRS AND SHARP EDGES
4. MOUNT INSERTS AFTER FINISHING

NOTES

Q'TY./UNIT	MODEL USED ON	ASS'Y. NO.
1	LRRA-1	

SCALE — CODE

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

MATERIAL: .064 THICK, ALUMINUM, 5052-H32

FINISH: 5404-IRIDITE, 14-2 AL-COAT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS: .X ± .05, .XX ± .01, .XXX ± .005 — FRACTIONS: ± 1/64 — ANGLES: ± 0° 30' — TOLERANCES

THE TECHNICAL MATERIEL CORP.
MAMARONECK, NEW YORK

TITLE: CHASSIS, OUTPUT

DRAWN	JC	DATE	8/4/65
CHECKED		DATE	8/4/65
ELECT. DES.		DATE	
MECH. DES.		DATE	
FINAL APPROVAL		DATE	7/10/69

MS4686 — SHEET — REV. LTR. Ø

TMC FORM 110

REPROVEL NO. 440H 21539