| REVISIONS | | | | | | | |
|---|---|---|---|---|---|---|---|
| E.M.N. NO. | DRAFT | CHKD | ZONE | LTR | DESCRIPTION | DATE | APPROVED |
| | dw | | | Ø | ORIGINAL RELEASE FOR PRODUCTION | 4-15-80 | |
| 21793 | GDL | | | A | Dim 4 7/16 CHANGE TO 5 7/16 | 5-13-80 | |
| 21898 | GDL | | | B | DIMENSION'S HOLES ADDED | 7-13-81 | |

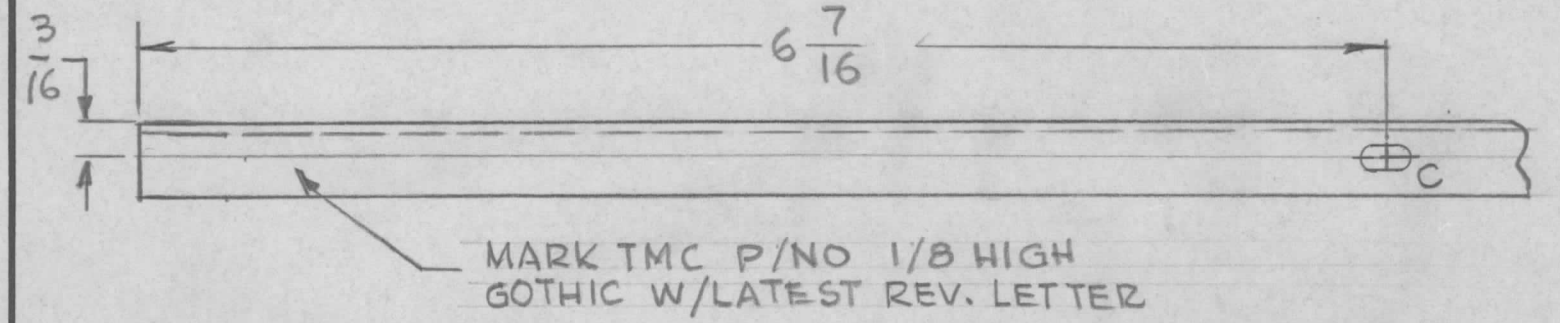


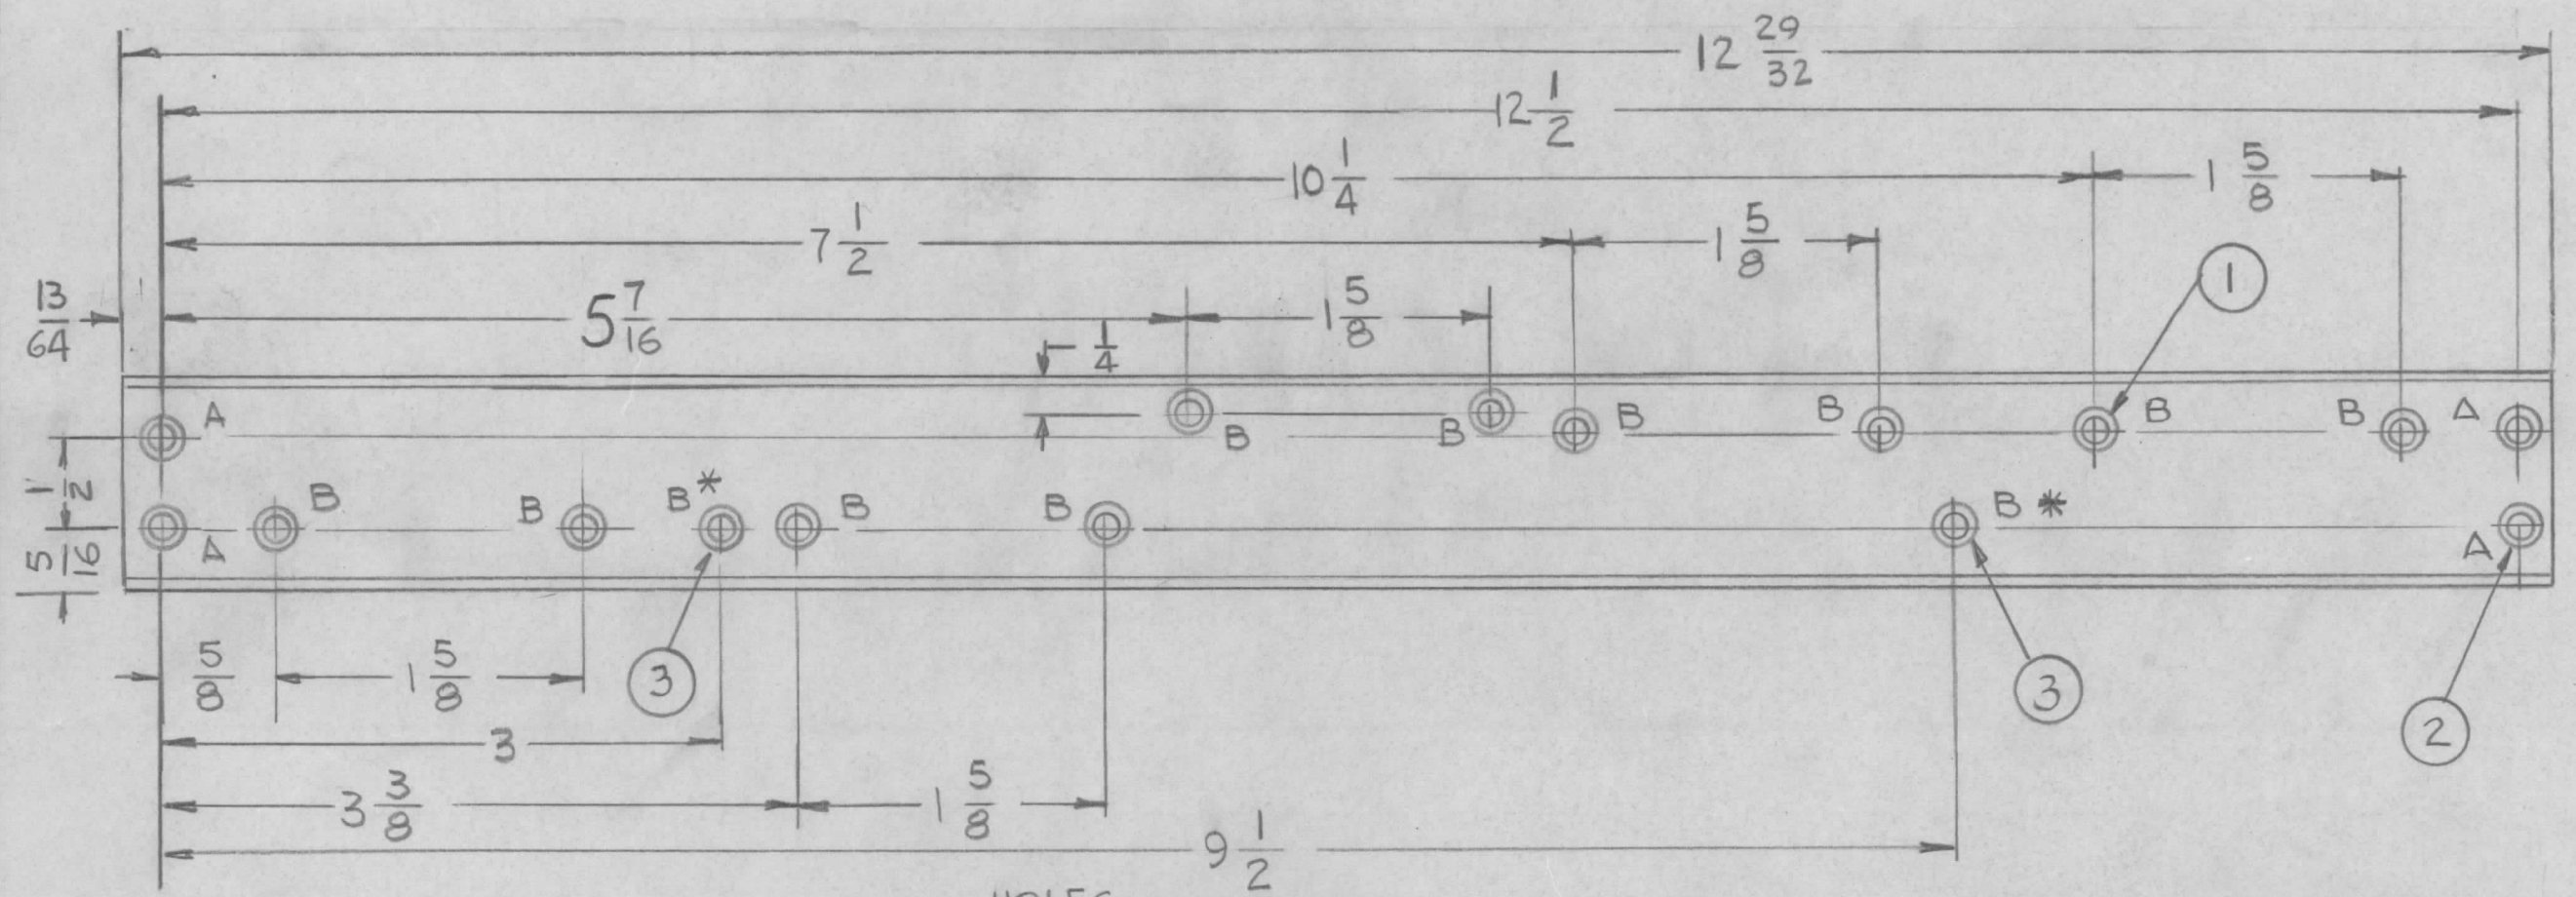


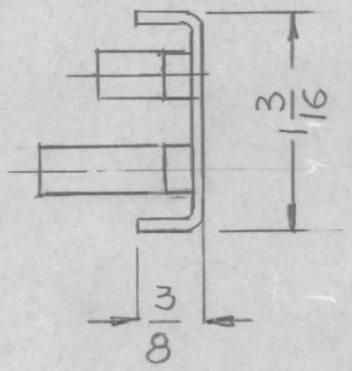


HOLES –
A - .161-.164 DIA - 4 REQ'D
B - .189 DIA - 12 REQ'D
C - 3/16 X 5/16 SLOT 1 REQ'D

| REQ'D | ITEM | PART NUMBER | DESCRIPTION | SYM. |
|---|---|---|---|---|
| 2 | 3 | TE 164-16 | NUT, PLAIN, CLINCH | B* |
| 4 | 2 | NT 129 0440-4 | NUT, ROUND | A |
| 10 | 1 | TE 164-19 | NUT, PLAIN, CLINCH | B |

LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED:

1. USE MATERIAL THICKNESS FOR MAXIMUM RADIUS ON ALL BENDS.
2. ALL ANGULAR BENDS 90 DEGREES.
3. REMOVE ALL BURRS AND SHARP EDGES.
4. MOUNT INSERTS AFTER FINISHING.

| QTY / UNIT | MODEL USED ON | ASS'Y NO. |
|---|---|---|
| 1 | AMC-32A | |

APPLICATION

CODE


NOTICE TO PERSONS RECEIVING THIS DRAWING
THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to re[illegible] at any time.


UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05, .XX ± .01, .XXX ± .005 TOLS. FRACTIONS 1/64 ANGLES 0° 30'

MATERIAL .063 THK ALUM 5052-H32

FINISH S404 YEL. IRIDITE

| | | |
|---|---|---|
| FINAL APPROVAL | | DATE 4/15/80 |
| MECH. DES. | | DATE |
| ELECT. DES. | | DATE |
| CHECKED | | DATE |
| DRAWN | G.D.L | DATE 4-9-80 |

**THE TECHNICAL MATERIEL CORP.**
MAMARONECK, NEW YORK

CHASSIS, CRADLE, FRONT

| SIZE | CODE IDENT. NO. | DWG NO. | ISSUE |
|---|---|---|---|
| B | 82679 | MS 7015 | B |

SCALE 1:1 SHEET OF

FCI-10-170 (10-66)