REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	NP964	Ø

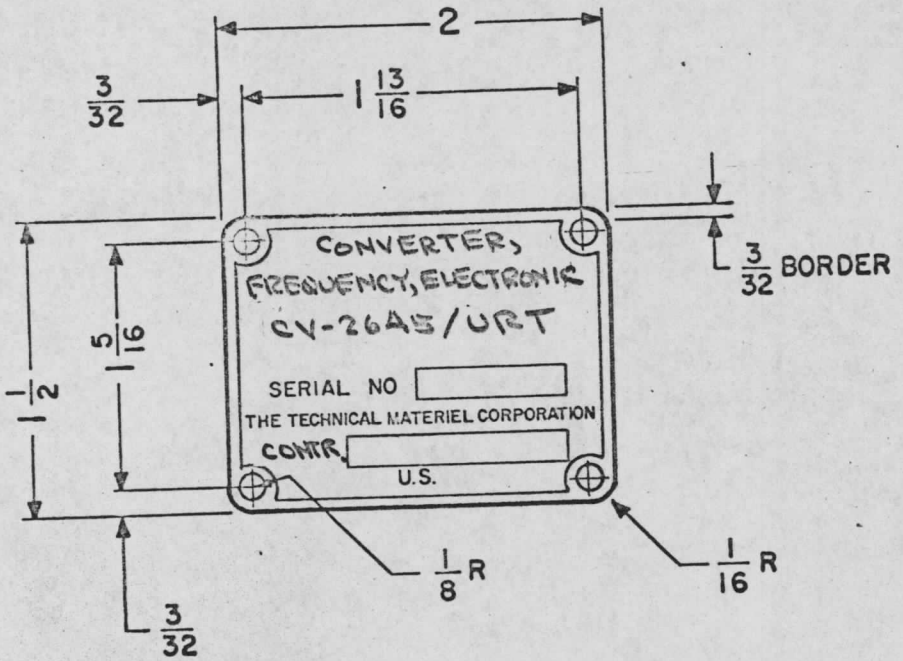

4 HOLES - 1/8 DIA.
SERIAL BLOCK - 5/32 x 3/4
ORDER BLOCK - 5/32 x 1-1/8

FINISH -
REVERSE ETCH, ANODIZE ON LUSTERLESS BLACK BACKGROUND. (TYPE 37038) PER-FED-STD-595. COLORLESS VARNISH PER MIL-V-6894.

MIN LETTER HEIGHT 3/64".

ORDER & SERIAL NUMBERS TO BE STEEL STAMPED BY TMC.

NAMEPLATE TO BE IN ACCORDANCE WITH MIL-STD-130 & MIL-M-13231 & AMENDS.

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	6/9/69	Ø	CDD		JDe
X	EXPER. RELEASE		X	G. Lucas		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ± .05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
		.032 THK.	THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		STOCK SIZE		
		ALUMINUM	NAMEPLATE, IDENTIFICATION	
		MATERIAL	TMC MODEL CMRA-4	
		5052-H32	G. Lucas CDD SPM 6/9/69	
		TYPE & TEMPER / HEAT TREAT. SPEC.	DRAWN / CHECKED / FINAL APPROVAL	
		SEE NOTE	NP964 Ø	
		FINISH & SPEC. NO.	ELEC. DES. APP. / MECH. DES. APP.	

REPROVEL NO. 440H 21540